

Getting to Know the Britax CLICKTIGHT Convertible Car Seats



Getting to Know the Britax CLICKTIGHT Convertible Car Seats

- When you have completed this Continuing Education Unit session you will:
 - ✓ Have an understanding of the product features that BRITAX CLICKTIGHT convertible seats include.
 - ✓ Be familiar with the weight, height and age requirements for BRITAX CLICKTIGHT convertible seats including use of the CLICKTIGHT Installation System.
 - ✓ Have a general understanding of the installation of BRITAX CLICKTIGHT convertible seats rear-facing.
 - ✓ Have a general understanding of the installation of BRITAX CLICKTIGHT convertible seats forward-facing.
- For this CEU opportunity, you must answer **16** out of **20** questions correctly in order to get the one (1) CEU awarded. If you incorrectly answer more than **4** questions, then you may review the material again and retake the quiz.
- Much of the information in this CEU material can be found at us.britax.com and in the user guide for the Britax One4Life.



The Car Seat GAME CHANGER



Why ClickTight® is a Game Changer

•

Quick easy access to the belt path



2.

Installs simply with just vehicle seat belt




3.

Built-in tensioner eliminates installation struggle



Snug as a Bug | ClickTight Car Seat Installation | Britax Video

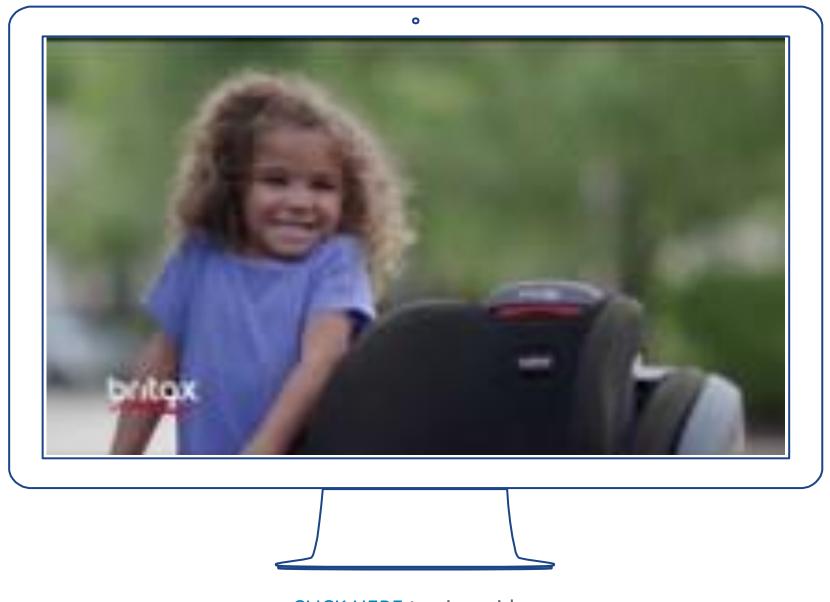



CLICKTIGHT Installation Technology





or pulling to tension the vehicle belt or compress the vehicle seat.



Installation with a vehicle seat belt is preferred / recommended over lower anchors



ALWAYS release vehicle buckle BEFORE opening CLICKTIGHT when removing from vehicle.





Marathon CT

Advocate CT

CLICKTIGHT Convertibles



(14) Harness slots: 8.35 to 19.4

49" Standing Height

Lower Connector (max child weight):

Marathon & Boulevard CT: 35 lbs. RF | 40 lbs. FF

Advocate CT: 30 lbs. RF | 35 lbs. FF

10-Year Expiration from date of manufacture



Boulevard CT





CLICKTIGHT Convertible Car Seat Comparison

Select Boulevard CLICKTIGHT models do not include Click N Safe or Impact Absorbing Chest Pads (HUGS) - (typically black shells).





Convertible Car Seat Comparison







EMBLEM



MARATHON CLICKTIGHT



BOULEVARD CLICKTIGHT



ADVOCATE CLICKTIGHT

			CLICKTIGHT	CLICKTIGHT	CLICKTIGHT
Rear-Facing Installation Methods	2 with infant positioning pillow	2 with infant positioning pillow	2 with comfort pillow	2 with comfort pillow	2 with comfort pillow
Forward-Facing Installation	•	•	•	•	•
Weight Capacity	Birth - 65 lbs	Birth - 65 lbs	Birth - 65 lbs	Birth - 65 lbs	Birth - 65 lbs
Layers of Side Impact Protection	1	2	1	2	3
Quick-Adjust Headrest	10	10	14	14	14
Recline Positions	3	3	7	7	7
Impact Stabilizing Steel Frame	•	•	•	•	•
Energy-Absorbing Base	•	•	•	•	•
Patented Energy-Absorbing 2-PT Tether	•	•	•	•	•
Lower LATCH Connectors	•	•	•	•	•
INSTALLATION SYSTEM			•	•	•
Anti-Rebound Bar			Optional	Optional	Optional

Child Fitment

- Britax strongly recommends that children ride rear facing to the highest weight or height specified.
- Britax strongly recommends that children should be secured with a harness system until they exceed the weight or height limits specified.

Forward Facing: 20 - 65 lbs (9.1 - 29.4 kg)

Britax strongly recommends that children should be secured with a harness system until they exceed the weight or height limits specified.

Use forward facing:

- with harness straps in the closest position above the child's shoulders, parallel to level ground and
- with children who weigh 20 65 lbs (9.1 – 29.4 kg) and
- who are 49 in. (124.5 cm) or less in height and
- ADVOCATE/BOULEVARD ONLY:
 when the top of the ears are below the top of the
 head restraint (left illustration) or
- MARATHON ONLY: when the top of the ears are below the top of the head pad (right illustration).


Rear Facing: 5 - 40 lbs (2.3 - 18 kg)


Britax strongly recommends that children ride rear facing to the highest weight or height specified.

Use rear facing:

- with harness straps in the closest position below the child's shoulders and
- with children who weigh 5 40 lbs (2.3 – 18 kg) and
- when the top of the child's head is at least 1 in. (2.5 cm) below the top of the head restraint (ADVOCATE/ BOULEVARD) or head pad (MARATHON).



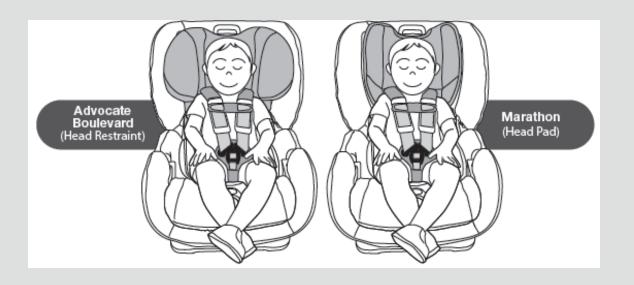

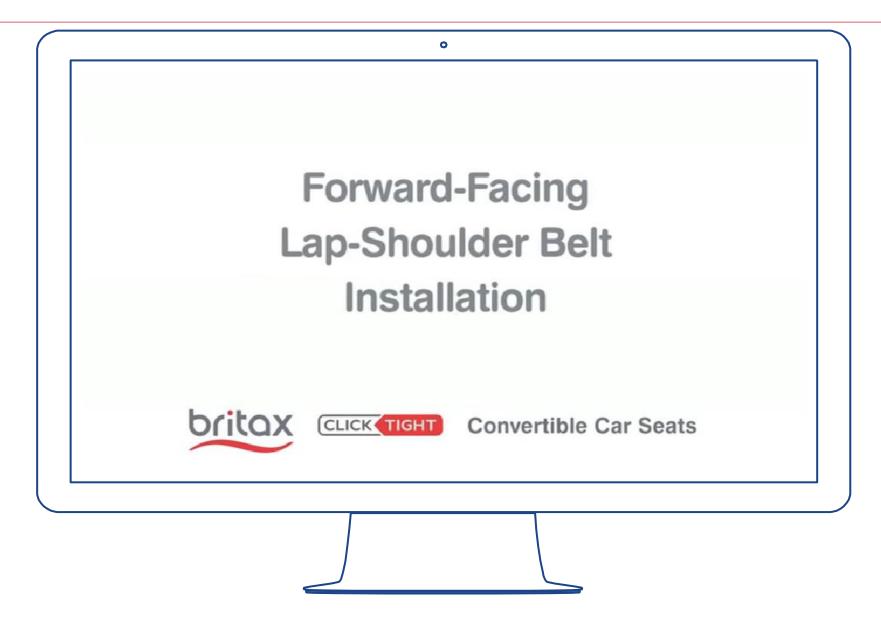




Buckle

There are three different buckle position slots. Adjust the buckle to the position closest to but not under the child. Never leave the buckle in the adjustment slot.

NOTE: If your child eats and drinks while in the child restraint, check the buckle periodically and clean out any accumulated debris (see page 55).

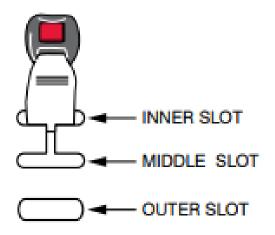

BUCKLE POSITION

Opening CLICKTIGHT on the Convertibles



CLICK HERE for How To Open CLICKTIGHT Panel Video

Open the ClickTight Panel



1. Identify the ClickTight Key. Find the indention.



 Place your finger on the indention and push forward



3. Hold the ClickTight Key with both fingers and rotate clockwise to unlock.



 Lift the front panel of the seat to reveal the belt nath



CLICKTIGHT Convertible Features

Marathon CLICKTIGHT



Boulevard CLICKTIGHT



Advocate CLICKTIGHT











CLICKTIGHT Convertible Features









CLICKTIGHT Convertible Features

CLICKTIGHT Convertibles have 7 recline positions. To adjust the recline position; Pull the recline handle then rotate the child seat shell until the ball in the recline indicator is in the allowable section for the child.






NOTE: Set the seat position **BEFORE** installing.

Rear-Facing

In rear-facing installations it is important that the child seat be reclined to maintain proper head and neck control with smaller infants. Use the recline indicator on the child seat to help achieve an acceptable recline angle,

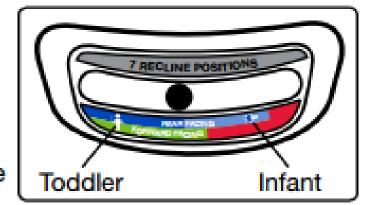

with the ball in the recline indicator in the allowable blue section for the size of the child. If necessary, the proper recline angle can be achieved by placing a rolled towel or pool noodle in the vehicle seat bight.

Recline

Infants and children with no head and neck control - recline indicator ball MUST BE in the light blue section

Older children with proper head and neck control - recline indicator ball CAN BE in light blue or dark blue.

NOTE: If necessary, the proper recline angle can be achieved by placing a rolled towel or pool noodle in the vehicle seat bight.

Adjusting the Harness Length

Prior to August 2017 User Guide indicated:

NOTE: Harness length can be extended if necessary for children over the age of 2.

Harness Hip Adjustment

<u>CLICK HERE</u> for How to Position in Standard Position

Standard Position



Harness Hip Adjustment - For Extra Room CLICK HERE for How to Lengthen Harness Long Length





Update: Adjusting the Harness length

https://us.britax.com/articles/product-knowledge/clicktight-installation-system/convertible-car-seats/



ClickTight Convertible Car Seat: Harness Hip Adjustment - Standard Position

Before installing and using your ClickTight convertible, ensure that the harness is properly adjusted and secured in the standard position at the hip.

READ MORE

IMPORTANT: Adjust the harness to the shortened length if a snug harness cannot be achieved with a small infant (approx. 10 lbs. and under).

Reflected in user guides August 2017

This can be applied retroactively.



ClickTight Convertible Car Seat: Harness Hip Adjustment - For Extra Room

Before installing and using your ClickTight convertible, ensure that the harness is properly adjusted and secured in the standard position at the hip.

READ MORE



Properly attaching the Harness straps to the Yoke:

Nest the harness loops left into the right and then slide the harness loops left to right on to yoke.



CLICK HERE for How to Attach Harness Straps to Yoke



Tether Update



Sewn loop with red lines hidden behind shell



Change in manufacturing: Sewn loop with red lines visible







Car seat should be replaced.


See user guide.

One side of the harness isn't tightening as tight as the other. What could it be?

Check to make sure BOTH hip anchors are securely attached in the SAME positions (short (standard) length or long length) and routed correctly.



 Check to make sure there is no excess slack from the harness trapped under the seating area.

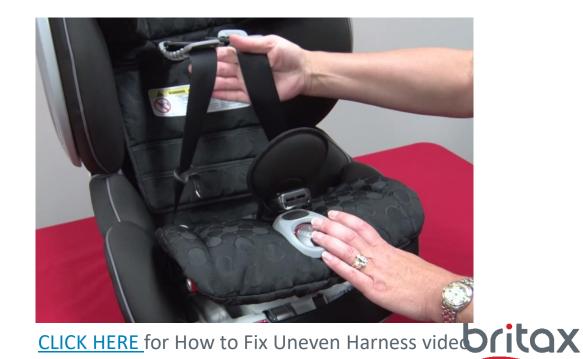

When trying uninstall a CLICKTIGHT convertible, the CLICKTIGHT dial will not turn to open. What is wrong?

When uninstalling a BRITAX car seat with CLICKTIGHT Installation Technology, always release the vehicle seat belt buckle first. This relieves the tension on the dial allowing it to open easily.





CLICK HERE for How to Uninstall a CLICKTIGHT Installed with seat belt



How do I know which buckle position to use?

<u>CLICK HERE</u> for How to Adjust the Harness Buckle Position

Harness Buckle Position

The child seat shell contains an inner buckle slot and an outer buckle slot.

> INNER SLOT ADJUSTMENT

OUTER SLOT

SLOT

- For rear-facing installations, position the buckle in the slot closest to but not under the child.
- For forward-facing installations, use the outer buckle slot only.

Reposition the harness buckle by following the steps on pages 38-39.

NOTE: NEVER leave the buckle in the adjustment slot.



Are the Impact Absorbing Chest pads required on CT convertibles?



Securing Your Child

IMPORTANT: Impact absorbing chest pads are highly recommended for forward-facing mode. Removal of chest pads is optional for rear-facing mode to ensure a snug fit for small infants.

Select models of CLICKTIGHT convertibles do not come with chest pads. (typically black shells)

This slide pertains specifically to CLICKTIGHT convertibles.








Where is the serial number and manufacture date on CLICKTIGHT convertibles?

Under child's left knee | may or may not need to open CLICKTIGHT



Tether attached during an impact?

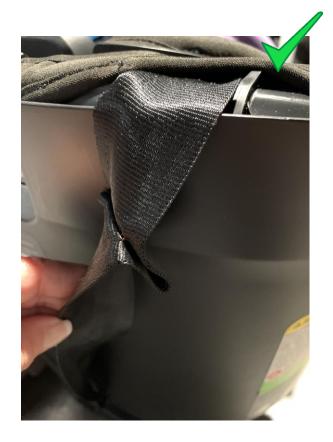






This is one indicator the seat should be replaced.



Can a Britax car seat be installed in the center seating position borrowing the inner anchors (LATCH) of the outboard seating positions?

No. To use lower anchors / LATCH, it must be a designated LATCH position by the vehicle with standard spacing.


Using the Lower Anchors and Tethers for Children (LATCH)

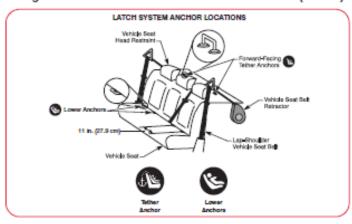

The Lower Anchors and Tethers for Children or LATCH, is a system available on this child restraint that offers an alternative to vehicle seat belt installation methods. The figure above shows typical locations for lower anchors and tether anchors in a vehicle. See pages 2-3 for LATCH components on this child restraint.

Check your vehicle owner's manual to learn if it is equipped with LATCH, the maximum weight rating for the lower anchors, tether anchors capacities, and information on the lower anchor locations and designated seating positions available for use with this child restraint.

Tether anchor locations vary from vehicle to vehicle. Check your vehicle owner's manual and look for the tether anchor symbol shown in the diagram to help identify where the top tether anchor point is located in your vehicle.




How much overhang is acceptable with any Britax car seat?

Harness Mode

- It is important that the base of the child restraint rests completely flat on the vehicle seat with no side overhang.
- It is permissible to allow up to 3 in. (7.6 cm) of the base to hang over the front edge of the vehicle seat.
- Side overhang is not permitted.

Booster Mode

- Overhang is not allowed in booster mode. In booster mode, the base of the child restraint must fit completely on the vehicle seat.
- Side overhang is not permitted.

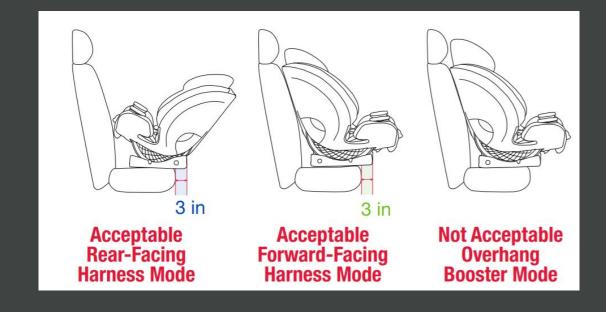



When do Britax car seats expire?

Safety Information

Warnings

▲ WARNING!

Failure to follow all warnings and instructions on the restraint system could result in SERIOUS INJURY or DEATH.

Carefully read all the instructions in this user guide and on the child restraint before using this product. Keep this user guide in the user guide storage pocket under the seat cover for future use.

FIT REQUIREMENTS

- Use ONLY in REAR-facing position when using it with an infant weighing less than 22 lb (10 kg).
- Use in harness mode ONLY with children who weigh between 5 and 65 lb (2.3 and 29.5 kg) and whose height is 49 in (124.5 cm) or less.
- Use REAR-facing for children who weigh between 5 and 50 lb (2.3 and 22.7 kg).
- Use FORWARD-facing with a harness for children who weigh between 22 and 65 lb (10 and 29.5 kg).
- Use in BOOSTER mode only with children who weigh between 40 and 120 lb (18.1 and 54.4 kg) and whose height is between 44 and 63 in (111.8 and 160 cm).

INSTALLATION

- Secure the top tether strap provided with this child restraint for FORWARD-facing harness mode.
- Car seat base MUST be flat on vehicle seat and MUST be parallel to vehicle seat.
- Snugly adjust the belts provided with this child restraint around your child.
- Use only the vehicle's lap and shoulder belt system when restraining the child in this BOOSTER seat. Never secure a child with a lap belt only in BOOSTER mode.
- Use only the "B" recline position when using child restraint in BOOSTER mode.
- For models with anti-rebound bar, the anti-rebound bar MUST be removed for FORWARD-facing.

GENERAL USE

- Secure this child restraint with the vehicle's child restraint anchorage system, if available, or with a vehicle coat helt.
- · Register your child restraint with the manufacturer.
- The headrest cover MUST be unfolded for children weighing 9.1 kg (20 lb) or more.
- The provided infant position pillow MUST be removed for children weighing 9.1 kg (20 lb) or more.
- When not in use, the lower anchor adjuster and strap MUST be stored in the storage pouch inside of the seat.

NOTES:

- Britax strongly recommends that children should remain in a child seat with a 5-point harness until reaching the maximum weight or height allowed.
- To prevent injury due to deterioration or hidden damage, discontinue use of this child restraint if it is older than ten (10) years. See the Serial Number and Manufactured Date Label on the child restraint.
- Before each use, check this child restraint and its components to make sure they are in good condition and good working order.
- Discontinue use of this child restraint if it has been in a moderate or severe crash. It is not necessary to replace a child restraint after a minor crash, defined by the US National Highway Traffic Safety Administration (NHTSA) as:
 - a. The vehicle is drivable from the crash site; and
 - The vehicle door nearest to the child restraint was not damaged; and
 - No vehicle occupants were injured; and
 - d. There is no visible damage to the child restraint;
 and
 - e. The airbags (if present) did not deploy.
- ALWAYS make sure the child restraint system is secured to the vehicle, even when unoccupied, since in a crash, an unsecured child restraint system may injure occupants.
- Verify that the child restraint and child restraint belts or straps do not interfere with the opening and closing of the vehicle door.
- Consult vehicle user guide to ensure child restraint installation does not interfere with function of vehicle seats
- Snugly adjust the belts provided with the child restraint around your child
- Ensure the lower harness (waist) straps are firmly adjusted in a position so that the child's pelvic area is secure.
- Ensure the upper harness (shoulder) straps are firmly adjusted so that the child is secure.
- The use of non-Britax covers, inserts, toys, accessories or tightening devices is not approved by Britax. Their use could cause this child restraint not to perform as intended in a crash.
- Cover the child restraint when the vehicle is parked in direct sunlight. Metal parts of child restraint could become hot enough to burn a child.
- Store the child restraint in a cool and dry place when it is not being used. Avoid placing heavy objects on top of it.
- Do not attempt to disassemble any part of the child restraint or change the way the harness or vehicle's seat belts are used, except as described in this booklet.

The statement for number of years will be found in the Warnings / Note section of user guide.

For newer models, it can also be found on the serial number label.

MODEL: XXXXXXXXXXXXX

BATCH/LOTE: XXXXXXXXXX

SERIAL/SERIE: XXXXXXXXXXXXXXX

EXPIRES/EXPIRS: 09/31/2024

MANUFACTURED FABRICADOS:

09 2018 MO/MES YR/AÑO

MANUFACTURED BY/FABRICADOS POR:

BRITAX CHILD SAFETY, INC.

4140 PLEASANT RD. FORT MILL, SC 29708 USA



Installation of a BRITAX car seat when vehicle head restraint causes interference.

Vehicle Headrest

A WARNING!

In some cases, the vehicle headrest can prevent the child restraint headrest from being raised high enough to properly adjust the harness for the fit of your child when using a forward-facing reclined position. DO NOT force the child restraint headrest past the vehicle



headrest. Doing so could cause the child restraint not to perform as intended. If the location of the vehicle headrest interferes with the child restraint headrest, raise or remove the vehicle headrest. If the vehicle headrest can not be removed, move the child restraint to the upright position or try a different seating location.



Can Britax car seats and booster seats be installed with Child Safety, Inc. All rights reserved Inflatable Seat Belts?

Please see our Inflatable Seat Belt Policy – https://us.britax.com/service-support/inflatable-seat-belt-policy/

Not all models of BRITAX car seats are approved for use with inflatable seat belts. At this time, ONLY the Ford Motor Company (Ford and Lincoln vehicles) Inflatable seat belt system is approved for use with the following BRITAX models: B-SAFE, Britax G Series Convertibles (Roundabout, Marathon, Boulevard, Advocate), Pioneer 70, Pioneer, Frontier, Frontier 85, Frontier 90, Frontier CLICKTIGHT, Pinnacle 90, Pinnacle CLICKTIGHT, Parkway SG and Parkway SGL.

If your car seat model is not listed above, it is NOT approved for use with the Ford inflatable seat belt system or any other inflatable seat belt system.

For more information on Inflatable seat belts, please <u>click here</u>.

In User Guides | COMPATIBLE SEAT BELTS

NOTE:

This BRITAX car seat may not be compatible with every inflatable lap-shoulder belt.

See FAQS in the support section of the BRITAX website (https://www.britax.ca/faqs OR https://us.britax.com/faqs/installation-questions/) for additional instructions.

Compatible	Not Compatible
B-SAFE (30 lb. capacity)	35 lb RFO with base 35 lb RFO without base
G Series Convertibles	Allegiance & Emblem CLICKTIGHT Convertibles
Pioneer Frontier CLICKTIGHT Pinnacle CLICKTIGHT	DualFit Grow With You Grow With You CLICKTIGHT Grow With You CLICKTIGHT PLUS One4Life
Parkway SG & SGL	Highpoint, Midpoint & Skyline





How do I clean my soft goods (covers)?

- ONLY SafeWash covers by Britax are machine washable and machine dryable.
- USER GUIDE Cleaning Instructions:
 - Refer to product care label for wash instructions.
 - If care label indicates machine washable, always refer to us.britax.com/faqs for important care information.



Naturally flame-retardant knit is safe to machine wash and dry. us.Britax.com/pages/safewash

Care Instructions Instructions d'Entretien Instrucciones de Cuidado

Machine wash old, delicate cycle

Laver à la machine à l'eau froide, cycle dellicat avec savon doux Lave a máquina con agua fría, ciclo de ropa fina con jabón suave

Tumble dry low



Secher à la machine cycle doux Secar a temperatura baja

DO NOT iron



NE PAS repasser NO planchar

DO NOT bleach

NE PAS javeliser NO utilizar lejía

DO NOT dry clean



NE PAS faire nettoyer á sec NO limpiar en seco

P11250400 A:08.18

Care Instructions Instructions d'Entretien Instrucciones de Cuidado



land wash with mild soap

in a l'eau froide et savon doux Lavar a mano en agua fría con jabón suave

Line dry



Séchez sur corde á linge Colgar para secar



DO NOT iron

NE PAS repasser NO planchar



DO NOT bleach

NE PAS iaveliser NO utilizar lejía

DO NOT dry clean



NE PAS faire nettoyer á sec NO limpiar en seco

DO NOT machine dry


NE PAS mettre dans une sécheuse NO secar en secadora

P256900 R3:07.13



Crotch Rolls & Side Rolls

ANSWER:

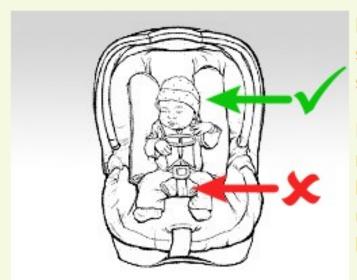

BRITAX rear-facing only and convertible car seats provide positioning inserts with the car seat. As well, offer multiple crotch buckle positions to assist in properly positioning and securing the child in the harness system.

If the positioning insert provided with the BRITAX car seat does not position the child as needed, it is acceptable to place a rolled receiving blanket on each side of the child for lateral support – once the child is properly secured within the harness as instructed in the user guide. The rolled receiving blankets should not be placed between the child and the harness.

It is **not** acceptable to use a crotch roll with any BRITAX car seat to position a child.



Serial numbers......It is like finding Waldo!











Grow With You & Grow With You CT









2-Stage Belt-Positioning Boosters







Replacement after a Motor Vehicle Crash

Discontinue use of this child seat if it has been in a moderate or severe crash. It is not necessary to replace a car seat after a minor crash, defined by the US National Highway Traffic Safety Administration (NHTSA) as:

- a. The vehicle is drivable from the crash site; and
- b. The vehicle door nearest the child seat was not damaged; and
- c. No vehicle occupants were injured; and
- d. There is no visible damage to the child seat; and
- e. The airbags (if present) did not deploy

This information can be found in each Britax product user guide in the WARNINGS or IMPORTANT NOTES section.



Coats | Heavy Clothing



BULKY COAT



LOOSE HARNESS

The following is in each BRITAX user guide in "Securing the Child".

IMPORTANT: Remove bulky coats and/ or jackets before putting the child in the car seat.

- Some suggestions would be:
 - Preheat car.
 - Put jacket on backwards after child is secured in harness.
 - The B-WARM can be used with any Britax rearfacing only seat.



Accessory / Non-Regulated BY BRITAX FOR BRITAX








- Not just any item
 - only made by Britax for Britax.
- You can find all Britax accessories by visiting us.Britax.com








Use on Aircraft

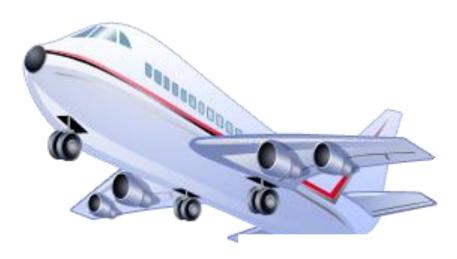

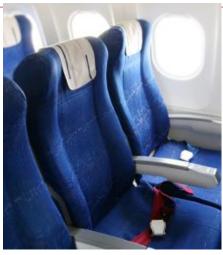

A WARNING! INJURY can occur

HARNESS MODE • Use only in a rear-facing position when using it with an infant weighing less than 22 pounds (10 kg), • Use only with children who weigh between 5 and 65 pounds (2.3 and 29.5 kg) and with a height of 49 inches (124.5 cm) or less. • Rear-facing for children weighing between 5 and 50 pounds (2.3 and 22.7 kg) and forward-facing for children weighing between 22 and 65 pounds (10 and 29.5 kg). BOOSTER MODE • Use weighting between 22 and 65 pounds (10 and 29.5 kg). BOOSTER MODE • Use only with children who weigh between 40 and 120 lbs (18.1 and 54.4 kg) and whose height is between 44 and 63 inches (111.8 and 160 cm). Snugly adjust the belts provided with this child restraint around your child. . Secure the top anchorage strap provided with this child restraint. . Use only the vehicle's lap and shoulder belt system when restraining the child in this booster seat. • Secure this child restraint with the vehicle's child restraint anchorage system, if available, or with a vehicle belt. • Follow all instructions on this child restraint and in the written instructions located in the pocket behind the cover of the child seat. • Register your child restraint with the manufacturer. • The provided infant positioning pillow MUST be removed for children weighing 20 lb (9.1 kg) or more

This child restraint system conforms to all applicable Federal Motor Vehicle Safety Standards. This Restraint is Certified for Use in Motor Vehicles and Aircraft when used

INSTALLATION HARNESS MODE 5 - 50 LBS (2.3 - 22.7 KG) Less than 49 in (124.5 cm





Harness straps in closest position above the child's

- Make sure your car seats is approved for use on aircraft. Look for statement on label:
 - This restraint is certified for use in motor vehicles and aircraft.
 - Belt-positioning booster seats a NOT approved for use on aircraft.
- Best practice is EVERY family member has a seat and is properly secured (seat belt or car seat. While the FAA allows children under the age of 2 to be held on lap, remember – turbulences are unexpected at any time.
- Call airlines and ask if there are discounts for seats for children flying during nonpopular times or flights.
- By bringing YOUR car seat with you you do not have to worry about renting a car seat from a car rental agency.





IMPORTANTE

En caso de una retirada, sólo podemos comunicarnos con usted si tenemos su nombre y dirección.

Usted DÉBE enviar la tarjeta adjunta o registrese en línea para estar en nuestra lista para productos con avisos de retiro del mercado a causa de defectos.

Nosotros va hemos pagado el envío.

Hágalo hoy.

IMPORTANT

In case of a recall, we can reach you only if we have your name and address. You MUST send in the attached card or register online to be on our recall list.

We've already paid the postage.

Do it today.



BRITAX CHILD SAFETY INC ALLENTOWN PA 18109-9925

PO BOX 91167

Կովիլ||Մժժգիկիկոխժիլ|||Մփ|||Մփ|||ԿիկիգեժՄժկ|

Por favor, tómese unos momentos para llenar y devolver la tarieta adjunta o registrese en línea a través del enlace directo a la página web del fabricante.

PARA LA SEGURIDAD DE SU NIÑO

Aunque los asientos de seguridad para niños se someten a pruebas y evaluación, es posible que un asiento de seguridad para niños podría ser

En caso de una retirada, sólo podemos comunicarnos con usted si enemos su nombre y dirección, así que por favor envíe la tarjeta o registrese en línea para estar en nuestra lista de productos con avisos de retiro del mercado a causa de defectos.

Por favor, llene su tarieta y envíela AHORA, o registrese en línea en www.BritaxUSA.com/registration mientras que usted está pensando en ello.

La tarjeta ya esta dirigida a Britax y hemos pagado los gastos de envío.

FOR YOUR CHILD'S CONTINUED SAFETY

Please take a few moments to promptly fill out and return the attached card or register online using the direct link to the manufacturer's website provided.

Although child restraint systems undergo testing and evaluation, it is possible that a child restraint could be recalled.

In case of recall, we can reach you only if we have your name and address, so please send in the card or register online to be on our recall list.

Please fill this card out and mail it NOW, or register online at www.BritaxUSA.com/registration, while you are thinking about it.

The card is already addressed and we've paid the postage

		9 - d-d /
	your name and address and ue escribir tu nombre y dirección y direc	
Address/Dirección		
City/Ciudad	State/Estado	Zip/ Código Postal
Country/País		
E-mail/Correo electronico (optional/opcional)		
	ESTRAINT REGISTRA RO PARA ASIENTOS DE S	

Always check to see if a CRS is affected by a Safety Notice & Register all Car Seats

- Visit the manufacturers website
 - Safety Notices
 - http://wwwodi.nhtsa.dot.gov/owners/SearchSafetyIssues?prodType=C
 - https://us.britax.com/service-support/safety-notices/
 - Register CRS
 - Reassure caregivers manufacturers cannot use their contact information for any reason other than to contact them in the event of a Safety Notice.
 - Mailing registration card
 - On-line
 - Call car seat manufacturer Customer Service
 - Number in user guide, label on car seat
 - https://us.britax.com/support/register-product



Additional Resources: Installation Videos

- > CLICK HERE for Marathon CLICKTIGHT Installation Videos
- > CLICK HERE for Boulevard CLICKTIGHT Installation Videos
- CLICK HERE for Advocate Installation Videos
- Rear-Facing Installation
 - ✓ CLICK HERE for Anti-Rebound Bar Attachment Video
 - ✓ <u>CLICK HERE</u> for Lower Anchor Installation
 - ✓ CLICK HERE for Lap Belt Installation
 - ✓ <u>CLICK HERE</u> for Lap-Shoulder Belt Installation
- > Forward-Facing Installation
 - ✓ <u>CLICK HERE</u> for LATCH Installation
 - ✓ <u>CLICK HERE</u> for Lap Belt Installation
 - ✓ <u>CLICK HERE</u> for Lap-Shoulder Belt Installation



Additional Resources



Installation Videos (YouTube Channel)

http://youtube.com/BritaxUSACarSeats



Access the current BRITAX product user guides

https://us.britax.com/service-support/instructional-videos-and-user-manuals/



Contact Britax Customer Service

888-427-4829 | Monday-Thursday 9 AM – 5:15 PM | Friday 9 AM – 4:45 PM



To determine lower anchor and/or tether capacity use by vehicle make.

https://www.cpsboard.org/wp-content/uploads/2019/11/VM-LATCH-Anchor-Weight-Limits-2019-11.pdf



Additional CEU material accessible through your profile at cert.safekids.org

Online CEUs \rightarrow 3. Britax Tech Site \rightarrow Obtain CEUs





Director, Consumer Advocacy

Technician Discounts
Product Assistance as Technician/Instructor:



Email: Sarah.Tilton@Britax.com



Phone: (704) 409-1695



https://www.facebook.com/britaxcpsti.sarahtilton



Thank you for learning more about BRITAX!

- Please CLICK HERE to take the quiz for the Getting to Know the Britax Belt-Positioning Booster Seats CEU Opportunity.
- Once you complete the quiz, you will receive your results via email.
- If you do not receive an email regarding your score in a timely fashion: (a) check your spam/junk folder and (b) consult your IT department that the system will allow emails from ceuquiz@britax.com.
- If you successfully completed the quiz, please save the email or print a copy and save with your recertification documentation.
 - ✓ The emails come from wordpress@ceu.britaxusa.com. If you do not receive within 24-48 hours, please check your spam and junk folders. Some systems have been known not to deliver them to your inbox.
 - ✓ Certificates/emails of completion cannot be re-created.
- > If you did not successfully complete the quiz, please review the material again and retake the quiz when you are ready.

