



GETTING TO KNOW THE BRITAX REAR-FACING ONLY CAR SEATS

Continuing Education Unit

Getting to Know Britax Rear-Facing Only Car Seats

- ❑ When you have completed this Continuing Education Unit session you will:
 - ✓ Have an understanding of the product features that B-SAFE Gen2, B-SAFE Gen2 FlexFit, and B-SAFE Gen2 FlexFit Plus Rear-Facing Only car seats include.
 - ✓ Be familiar with the weight, height and age requirements for B-SAFE Gen2, B-SAFE Gen2 FlexFit, and B-SAFE Gen2 FlexFit Plus Rear-Facing Only.
 - ✓ Have a general understanding of the installation of B-SAFE Gen2, B-SAFE Gen2 FlexFit, and B-SAFE Gen2 FlexFit Plus Rear-Facing Only seats with the base.
 - ✓ Have a general understanding of the use of BRITAX B-SAFE Gen2, B-SAFE Gen2 FlexFit, and B-SAFE Gen2 FlexFit Plus Rear-Facing Only without the base.
- ❑ For this CEU opportunity, you must answer 16 out of 20 questions correctly in order to get the one (1) CEU awarded. If you incorrectly answer more than 4 questions, then you may review the material again and retake the quiz.

Rear-Facing ONLY



B-Safe® Gen2

Harness slots (Rethread): 5" – 7" – 9" – 11"
(2) Buckle Positions: 3.5" – 5.5"
Expires 6 Years from Date of Manufacture



B-Safe® Gen2 FlexFit+



(6) Harness Positions (No rethread): 5" – 11"
(2) Buckle Positions: 3.5" – 5.5"
European Belt Guide | Anti-rebound bar
Expires 6 Years from Date of Manufacture



B-Safe® Gen2 FlexFit

(6) Harness Positions (No rethread): 5" – 11"
(2) Buckle Positions: 3.5" – 5.5"
European Belt Guide
Expires 6 Years from Date of Manufacture

Rear-Facing ONLY (Retired Q1 2021)

B-SAFE 35	B-SAFE 35 Elite	B-SAFE Ultra	Endeavours
			
Harness slots (Rethread): 5" – 7" – 9" – 11"	Harness Positions (No rethread): 5.5" – 6.5" – 8" – 8.75" – 10" – 11"	Harness Positions (No rethread): 5.5" – 6.5" – 8" – 8.75" – 10" – 11"	Harness Positions (No rethread): 5.5" – 6.5" – 8" – 8.75" – 10" – 11"
(2) Buckle Positions: 4" – 6"	(2) Buckle Positions: 4" – 6"	(2) Buckle Positions: 4" – 6" European Belt Guide EZ-Buckle Belly Pad	(2) Buckle Positions: 4" – 6" European Belt Guide EZ-Buckle Pad Anti-rebound bar
Expiration: 6 Years from DOM	Expiration: 6 Years from DOM	Expiration: 6 Years from DOM	Expiration: 6 Years from DOM



Measuring Guide	Weight (lbs)	Standing Height (in)
Rear-Facing	4–35	32 or less

How long can a child ride in a:

B-SAFE Gen2

B-SAFE Gen2 FlexFit

B-SAFE Gen2 FlexFit +

B-SAFE 35

B-SAFE 35 Elite

B-SAFE Ultra

Endeavours?

A child must meet all bulleted criteria to the left to be secured and transported in any Britax rear-facing only car seat.



Child Fit Information

Rear-Facing Only 4 - 35 lbs (1.8 - 15.8 kg)

Use rear-facing only with children:

- who weigh between 4 and 35 lbs (1.8 and 15.8 kg) **and**
- who are 32 inches (81.3 cm) in height or less **and**
- when the top of the head is one inch or more below the top of the child seat shell **and**
- when the harness straps are located in the closest harness slot at or below the child's shoulders.



IMPORTANT: See [Adjusting the Harness](#) on page 32.

Top of child's head
at least 1" (2.5 cm)
below top of shell

Harness in closest
position at or below
shoulder level

Chest clip at
center of child's
chest at armpit
level




Differentiating Features

B-Safe®Gen2



B-Safe®Gen2 FlexFit and B-Safe®Gen2 FlexFit +

No-rethread

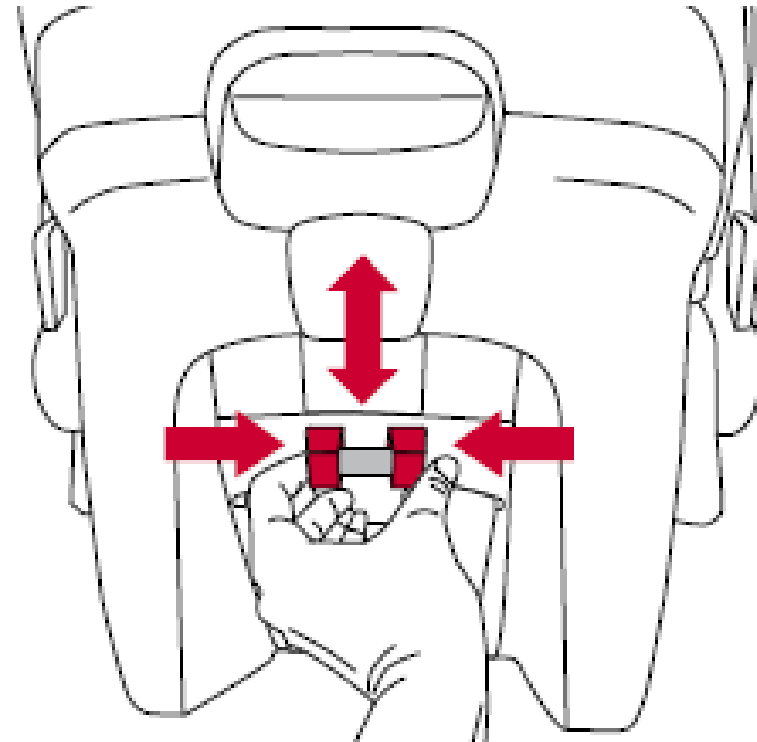

B-SAFE Gen2, B-SAFE Gen2 FlexFit & B-SAFE Gen2 FlexFit +

quick-adjust
HARNESS



FEATURES:

B-SAFE Gen2

B-SAFE Gen2 FlexFit

B-SAFE Gen2 FlexFit +

B-SAFE 35

B-SAFE 35 Elite

B-SAFE Ultra

Endeavours



Base Features:

- **Impact-absorbing base** compresses to absorb crash energy and counteract forward movement, keeping your child clear from the seat in front of them.



- **Impact-stabilizing steel frame** gives you peace of mind knowing there is strength where you want it most, through the spine of the car seat reducing forward flex and at the connection points to the vehicle.



Where is the serial number and date of manufacture located?



There is also a serial number label on the bottom of the base. Always check both – as a base can be purchased separately.

Use of Bases

① Comes with:


- B-SAFE 35
- B-SAFE 35 Elite
- B-SAFE Ultra
- B-Safe Gen2
- B-Safe Gen2 FlexFit

② Comes with:

- Endeavours
- B-Safe Gen2 FlexFit+

ALL bases can be used with:

- B-SAFE 35
- B-SAFE 35 Elite
- B-SAFE Ultra
- Endeavours
- B-Safe Gen2
- B-Safe Gen2 FlexFit
- B-Safe Gen2 FlexFit+

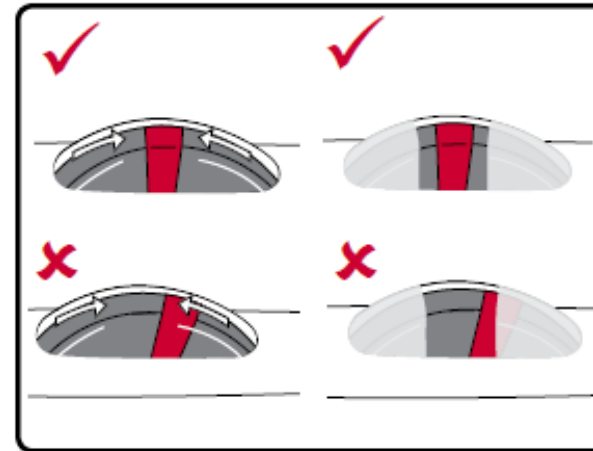


Head Pad Use in B-SAFE Gen2 & B-SAFE 35

- Use of the Head Pad (item #2) is OPTIONAL.
- OPTIONAL: left to one's choice, not required
- If it is used, remove when child no longer needs for positioning.
- There is no specific weight, height or harness height that it must be removed.



BRITAX Child Safety, Inc.

Features

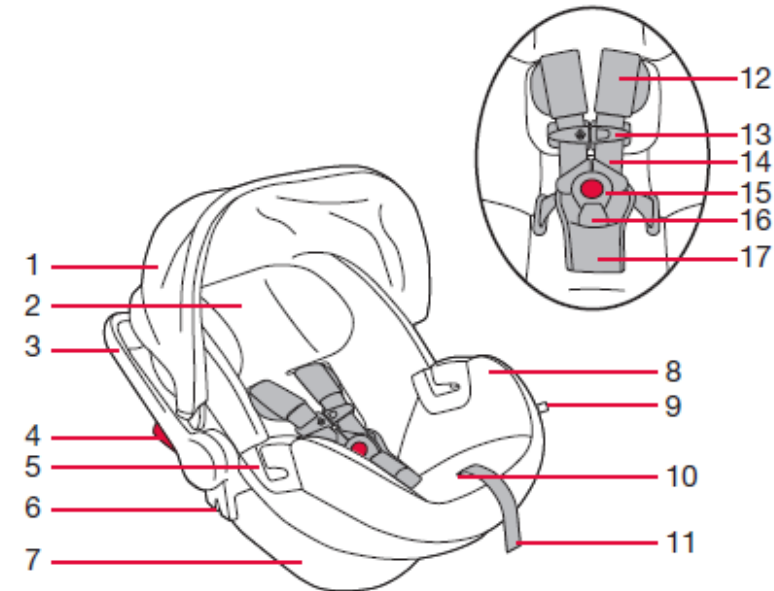

- | | |
|---|--|
| 1. Canopy | 9. Easy Remove Cover Tab |
| 2. Head Pad (optional) | 10. Harness Adjuster Lever (under cover) |
| 3. Carry Handle | 11. Harness Adjuster Strap |
| 4. Carry Handle Adjuster | 12. Comfort Pads (optional) |
| 5. Carrier Only Belt Guide/Harness Holder | 13. Chest Clip |
| 6. Stroller Adapter | 14. Harness Straps |
| 7. Shell | 15. Harness Buckle |
| 8. Cover | 16. Buckle Strap |
| | 17. Belly Pad |

Infant Comfort Pillow Use:

- B-SAFE Gen2 FlexFit
- B-SAFE Gen2 FlexFit Plus
- B-SAFE 35 Elite
- B-SAFE Ultra
- Endeavours


- The Infant Comfort Pillow (Item #10) is **OPTIONAL** for children 4-11 pounds.
 - **OPTIONAL**: : left to one's choice : not required
- IF it is used for a child between 4-11 pounds, remove when child weighs more than 11 lbs.

BRITAX Child Safety, Inc.


Infant Comfort Pillow

The infant comfort pillow is designed to provide better fit and comfort for infants using this child seat. The infant comfort pillow can be used with infants weighing between 4 and 11 lbs (1.8 and 5 kg). Do not use with infants over 11 lbs (5 kg).

Option 1: Provides additional support under your child to allow the harness straps to be at or below shoulder level and for a snug fit to be achieved. Infant comfort pillow is shipped in this position.

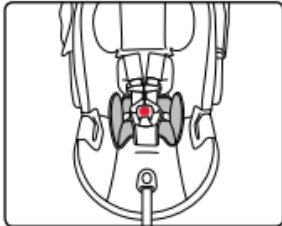


Option 2: Provides additional support behind your child to achieve head and neck alignment. To use, rotate the comfort pillow 180 degrees from the shipped position and tuck behind the bib of the head restraint cover.

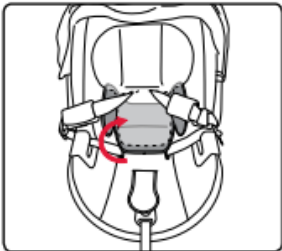

BRITAX Child Safety, Inc.

Features

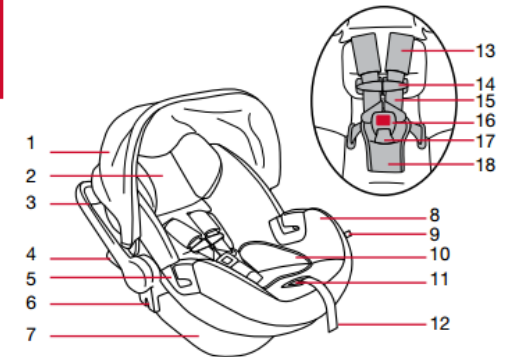

- | | |
|---|-----------------------------|
| 1. Canopy | 10. Infant Comfort Pillow |
| 2. Head Restraint | 11. Harness Adjuster Button |
| 3. Carry Handle | 12. Harness Adjuster Strap |
| 4. Carry Handle Adjuster | 13. Comfort Pads (optional) |
| 5. Carrier Only Belt Guide/Harness Holder | 14. Chest Clip |
| 6. Stroller Adapter | 15. Harness Straps |
| 7. Shell | 16. Harness Buckle |
| 8. Cover | 17. Buckle Strap |
| 9. Easy Remove Cover Tab | 18. Belly Pad |

Installation of Base

SafeCenter LATCH



SafeCenter
LATCH INSTALLATION

Lap-Shoulder Belt



built-in
LOCK-OFFS

[CLICK HERE](#) for Base Installation Video with SafeCenter LATCH | [CLICK HERE](#) for Base Installation Video with Lap-Shoulder Belt | [CLICK HERE](#) for Base Installation Video with Lap-Belt ONLY

Installation without the Base

[CLICK HERE](#) for Installation Video without base using Lap-Shoulder Belt



[CLICK HERE](#) for Installation Video without base using Lap-Belt ONLY




Installation Using the European Belt Guide



[CLICK HERE](#) for B-Safe Gen2 FlexFit Infant Car Seats: How to Install without Base using European Belt Guide

What is the appropriate recline angle when installing?

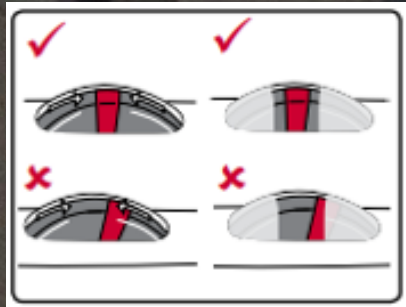

When installing with the base, the red indicator must be between the arrow points / completely visible.

(car parked on level surface)



CARRIER ONLY INSTALL: LINE SHOULD BE LEVEL TO GROUND

When installing the carrier without the base, the white line on side of carrier is to be level with the ground.

11 lbs. is the magical number requiring adjustment!

- Once the child is 11 lbs.:
 - The harness must be moved to the outer set of loops
 - The buckle must be moved to the outer position




Adjusting the Harness

The infant car seat is assembled with the harness in the inner loop.

- Inner Loop: For infants weighing less than 5 kg (11 lbs).
- Outer Loop: For infants weighing over 5 kg (11 lbs).


IMPORTANT: The harness straps should be located in the closest harness height position at or below the child's shoulders.

IMPORTANT: Ensure the harness straps are fully secured on the harness yoke.

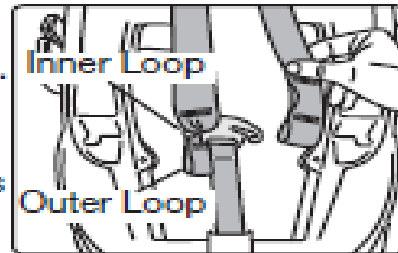

Adjusting the Buckle

- Inner Slot: For infants weighing less than 11 lbs (5 kg).
- Outer Slot: For infants weighing over 11 lbs (5 kg).

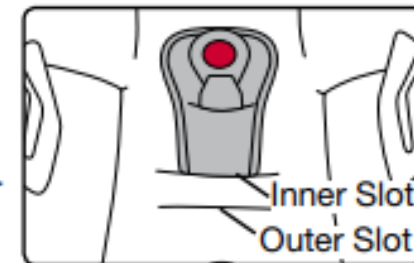

IMPORTANT: If your child eats and drinks while in the child seat, you will need to check the buckle periodically and rinse out any accumulated debris (see page 46).


What position can the Carry Handle be in when in the vehicle?

- In the vehicle the carry handle can be in ANY Locked position.
- Position 1 is highlighted as the ONLY carry position.

Handle Position

The car seat handle must be adjusted to one of the four locked positions for use in a vehicle.

Always use position 1 to carry the car seat.

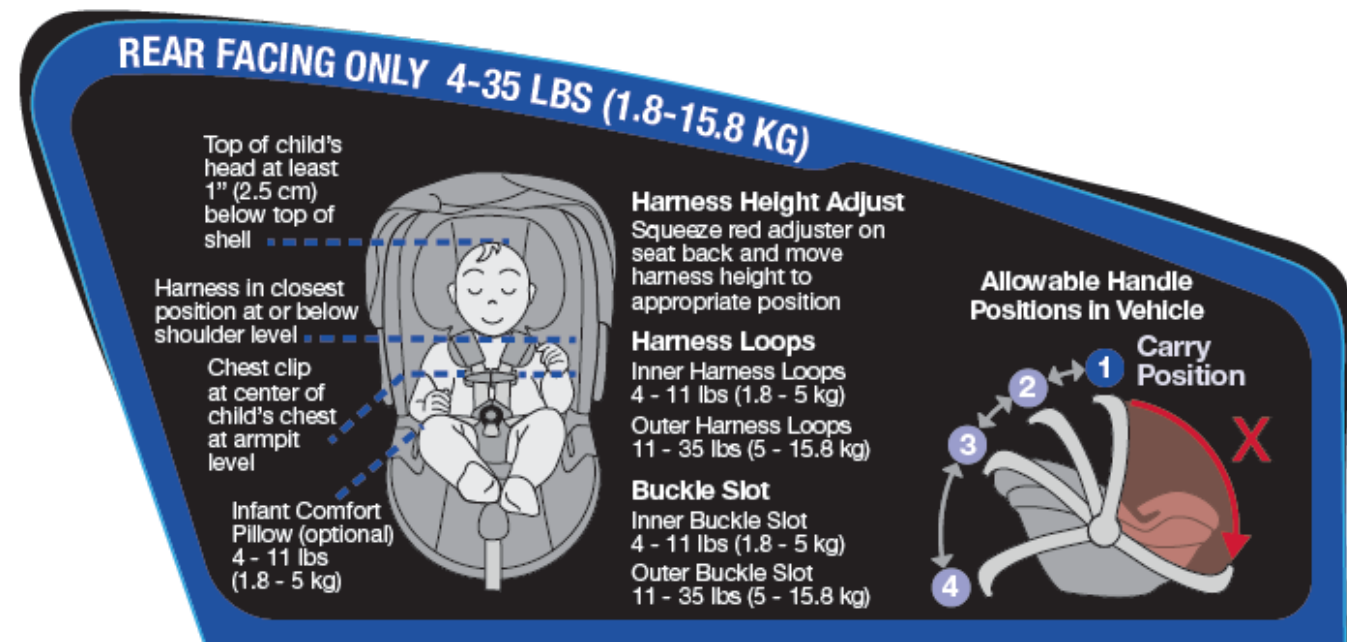

Is the B-SAFE series certified for use in aircraft?

☐ YES – when used WITHOUT the base.

WARNING! DEATH or SERIOUS INJURY can occur.

- Use only in a rear-facing position when using it in a vehicle.
- Use only with children who weigh between 4 and 35 lbs (1.8 and 15.8 kg) and whose height is 32 inches (81.3 cm) or less.
- Snugly adjust the belts provided with this child restraint around your child.
- Secure this child restraint with the vehicle's child restraint anchorage system if available or with a vehicle belt.
- Follow all instructions on this child restraint and in the written instructions located in the base storage slot.
- Register your child restraint with the manufacturer.
- NEVER leave child unattended.
- Suffocation Hazard: Infant carrier can roll over on soft surfaces and suffocate child. NEVER place carrier on beds, sofas, or other soft surfaces.
- Fall Hazard: Child's activity can move carrier. NEVER place carrier on counter tops, tables, or any other elevated surfaces.

This child restraint system conforms to all applicable Federal Motor Vehicle Safety Standards.

This Restraint is Certified for Use in Motor Vehicles and Aircraft.



Manufactured in Fort Mill, SC, with US and Global Components by Britax Child Safety, Inc. www.us.britax.com 1-704-409-1699
Patent/Patente: www.us.britax.com/pages/patents-united-states/

P12973100_A:09.20



B-SAFE GEN2 FLEXFIT & FLEXFIT PLUS User Guide

Certification

This Restraint is Certified For Use in Motor Vehicles and Aircraft.

Motor Vehicles

This child seat system conforms to all applicable Federal Motor Vehicle Safety Standards (FMVSS 213).

Aircraft



Certified for
Aircraft Travel

This child seat is certified for aircraft use. The FAA recommends that a child weighing up to 40 lbs (18 kg) use a certified, harnessed child seat while traveling on an aircraft.

Install your child seat in a window seat to avoid blocking the aisle. For aircraft installation, see [Lap Belt Installation](#) instructions without base on pages 26 - 27. **DO NOT use the base on aircraft.**


- * If the aircraft lap belt is too short, ask a flight attendant for a belt extender.
- * Inflatable aircraft lap belts are NOT compatible with this child seat.

What if the Correct Recline cannot be Achieved with the Base when the recline Adjustment Foot is all the Way Out?




B-SAFE GEN2 FLEXFIT & FLEXFIT PLUS User Guide

2. Move the base up or down until the red marker is visible between the two lines on the recline angle indicators while on the vehicle seat.

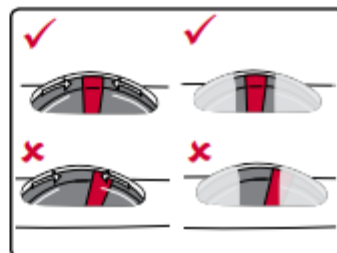

If there is a problem achieving the proper recline angle after installing, try another approved seating position in your vehicle or:

- a. Uninstall the base and lower the recline angle adjustment foot so that the recline foot is not extended.
- b. Remove the base from the vehicle and place a rolled towel or pool noodle in the vehicle seat bight.

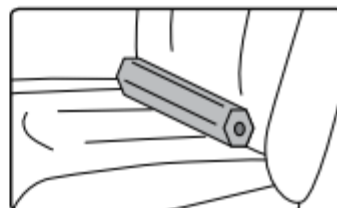

- c. Place the base against the towel or pool noodle to level the shell and install.

NOTE: If a towel or pool noodle is needed for the recline angle, the recline angle adjustment foot on the base should remain in its lowest position.

IMPORTANT: After the child is secured in the infant car seat and the car seat is attached to the base, ensure that the red marker is visible between the two lines on the recline angle indicator.





Serial numbers.....It is like finding Waldo!

Rear-Facing ONLY



One4Life All-in-One



CLICKTIGHT Convertibles



NON-CLICKTIGHT Convertibles




Grow With You & Grow With You CT



Pinnacle & Grow With You CT Plus



2-Stage Belt-Positioning Boosters

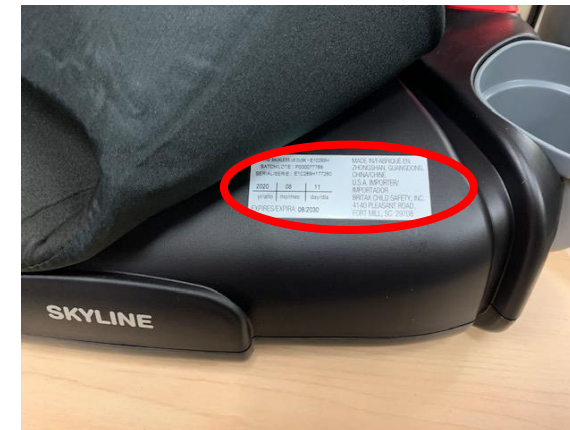


Belt-Positioning Boosters



Can a Britax car seat be installed in the center seating position borrowing the inner anchors (LATCH) of the outboard seating positions?

No. To use lower anchors / LATCH, it must be a designated LATCH position by the vehicle with standard spacing.


Using the Lower Anchors and Tethers for Children (LATCH)

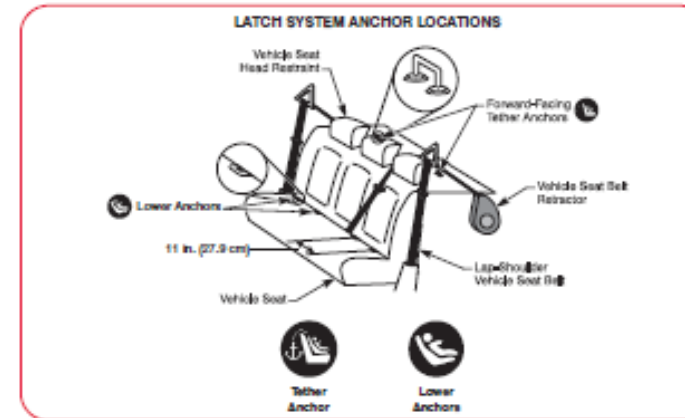

The Lower Anchors and Tethers for Children or LATCH, is a system available on this child restraint that offers an alternative to vehicle seat belt installation methods. The figure above shows typical locations for lower anchors and tether anchors in a vehicle. See pages 2-3 for LATCH components on this child restraint.

→ Check your vehicle owner's manual to learn if it is equipped with LATCH, the maximum weight rating for the lower anchors, tether anchors capacities, and information on the lower anchor locations and designated seating positions available for use with this child restraint.


Tether anchor locations vary from vehicle to vehicle. Check your vehicle owner's manual and look for the tether anchor symbol shown in the diagram to help identify where the top tether anchor point is located in your vehicle.

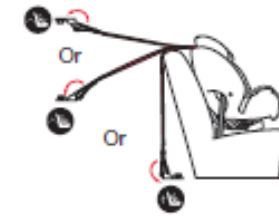

How much overhang is acceptable with any Britax car seat?



**Acceptable
Rear-Facing
Harness Mode**

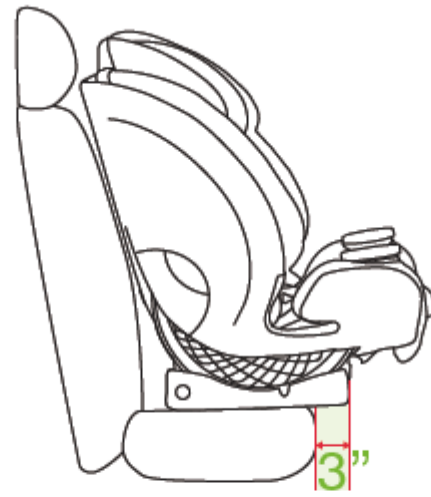

**Acceptable
Forward-Facing
Harness Mode**



**Not Acceptable
Overhang
Booster Mode**

Harness Mode

- It is important that the base of the child restraint rests completely flat on the vehicle seat with no side overhang.
- It is permissible to allow up to 3 in. (7.6 cm) of the base to hang over the front edge of the vehicle seat.
- Side overhang is not permitted.

Booster Mode

- Overhang is not allowed in booster mode. In booster mode, the base of the child restraint must fit completely on the vehicle seat.
- Side overhang is not permitted.

NOTE: This applies to ALL Britax products regardless of type of seat shown above.

When do Britax car seats expire?

Britax Child Safety, Inc.

Safety Information

⚠️ WARNING!


Failure to follow all warnings and instructions could result in **SERIOUS INJURY** or **DEATH**.

Read these instructions before use of the infant car seat.

- Use only in a rear-facing position when used in a vehicle.
- Use only with children who weigh between 5 and 35 pounds (2.3 and 15.8 kg) and whose height is 32 inches (81.3 cm) or less.
- Snugly adjust the belts provided with this car seat around your child.
- Secure this child restraint with the vehicle's restraint anchorage system if available or with the seat belt. Using both methods is not approved and could cause the child seat not to perform as intended in a crash.
- Follow all instructions on this child restraint and the written instructions located in the base compartment. Keep the instructions with the car seat for future use.
- Register your child restraint with the manufacturer.
- In a vehicle with rear designated seating positions, vehicle owners should be alerted that, according to accident statistics, children are safer when restrained in the rear seating positions than in the front seating positions. To ensure your child's safety, study *Vehicle Seating Positions* on page 40 of your vehicle owner's manual.
- This infant car seat must not be used in non-certified applications.
- NEVER leave child unattended.

4

B-SAFE GEN2 FLEXFIT & FLEXFIT PLUS User Guide

- The use of non-Britax covers, inserts, toys, accessories, or tightening devices is not approved by Britax. Their use could cause this child seat not to perform as intended in a crash.
- ALWAYS check the back seat upon leaving your vehicle to prevent leaving a child restrained in the infant car seat alone in the vehicle.
- Suffocation Hazard: Infant carrier can roll over on soft surfaces and suffocate child. NEVER place carrier on beds, sofas, or other soft surfaces.
- Fall Hazard: Child's activity can move carrier. NEVER place carrier on counter tops, tables, or any other elevated surface.
- Fall Hazard: The carrier can fall from the shopping cart. DO NOT use on shopping carts. 
- Strangulation Hazard: Children have STRANGLED in loose or partially buckled harness straps. Fully restrain the child even when carrier is used outside the vehicle.
- ALWAYS lift infant car seat by both sides of handle after installation in base to verify that it is secure.
- DO NOT use the infant carrier if it is damaged or broken.
- To prevent injury due to deterioration or hidden damage, DO NOT use this infant car seat and base if it is older than six (6) years or has been in a moderate or severe crash. See expiration date on the date of manufacture label located on the infant car seat and base.
- Always make sure the child restraint system is secured to the vehicle, even when unoccupied, since in a crash an unsecured child restraint system may injure occupants.

5

The statement for number of years will be found in the Warnings / Note section of user guide.

For newer models, it can also be found on the serial number label.

XXXXXXXXXXXXXXXXXXXXX		MANUFACTURED	
MODEL:	XXXXXXXXXXXXX	FABRICADOS:	
BATCH/LOTE:	XXXXXXXXXXXXX	09	2018
SERIAL/SERIE:	XXXXXXXXXXXXX	MO/MES	YR/AÑO
EXPIRES/EXPIRS: 09/31/2024			
MANUFACTURED BY/FABRICADOS POR:			
BRITAX CHILD SAFETY, INC.			
4140 PLEASANT RD. FORT MILL, SC 29708 USA			




Can Britax car seats and booster seats be installed with Inflatable Seat Belts?

Please see our Inflatable Seat Belt Policy – <https://us.britax.com/service-support/inflatable-seat-belt-policy/>

Not all models of BRITAX car seats are approved for use with inflatable seat belts. At this time, ONLY the Ford Motor Company (Ford and Lincoln vehicles) Inflatable seat belt system is approved for use with the following BRITAX models: **B-SAFE, Britax G Series Convertibles (Roundabout, Marathon, Boulevard, Advocate), Pioneer 70, Pioneer, Frontier, Frontier 85, Frontier 90, Frontier CLICKTIGHT, Pinnacle 90, Pinnacle CLICKTIGHT, Parkway SG and Parkway SGL.**

If your car seat model is not listed above, it is NOT approved for use with the Ford inflatable seat belt system or any other inflatable seat belt system.

For more information on Inflatable seat belts, please [click here](#).

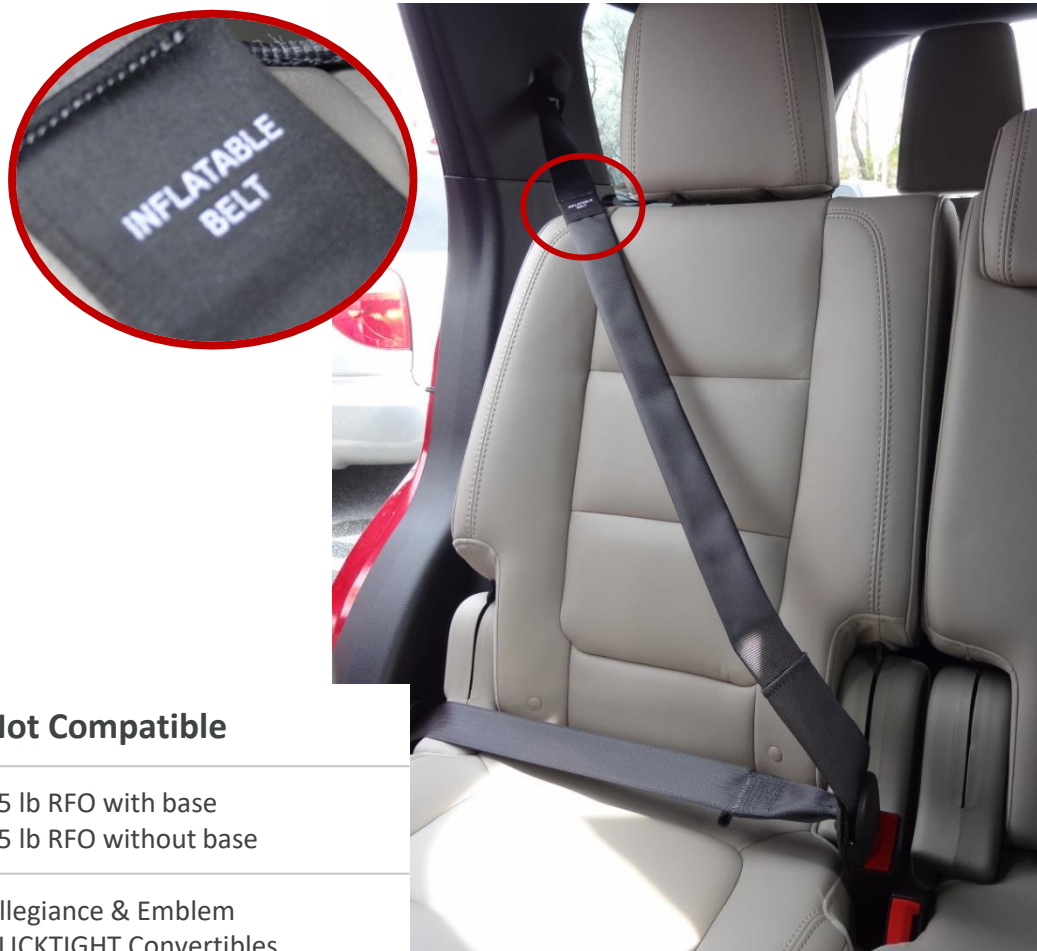

In User Guides | COMPATIBLE SEAT BELTS

NOTE:
This BRITAX car seat may not be compatible with every inflatable lap-shoulder belt.

See FAQs in the support section of the BRITAX website (<https://www.britax.ca/faqs> OR <https://us.britax.com/faqs/installation-questions/>) for additional instructions.


Compatible	Not Compatible
B-SAFE (30 lb. capacity)	35 lb RFO with base 35 lb RFO without base
G Series Convertibles	Allegiance & Emblem CLICKTIGHT Convertibles
Pioneer Frontier CLICKTIGHT Pinnacle CLICKTIGHT	DualFit Grow With You Grow With You CLICKTIGHT Grow With You CLICKTIGHT PLUS One4Life
Parkway SG & SGL	Highpoint, Midpoint & Skyline





How do I clean my soft goods (covers)?


- ONLY SafeWash covers by Britax are machine washable and machine dryable.
- USER GUIDE Cleaning Instructions:
 - Refer to product care label for wash instructions.
 - If care label indicates machine washable, always refer to us.britax.com/faqs for important care information.


Care Instructions
Instructions d'Entretien
Instrucciones de Cuidado

Machine wash cold, delicate cycle with mild soap
 Laver à la machine à l'eau froide, cycle délicat avec savon doux
Lave a máquina con agua fría, ciclo de ropa fina con jabón suave

Tumble dry low
 Sécher à la machine cycle doux
Secar a temperatura baja


DO NOT iron
 NE PAS repasser
NO planchar


DO NOT bleach
 NE PAS javeliser
NO utilizar lejía


DO NOT dry clean
 NE PAS faire nettoyer à sec
NO limpiar en seco


P11250400_A:08.18


Care Instructions
Instructions d'Entretien
Instrucciones de Cuidado


Hand wash with mild soap
 Laves à main à l'eau froide et savon doux
Lavar a mano en agua fría con jabón suave

Line dry
 Séchez sur corde à linge
Colgar para secar

DO NOT iron
 NE PAS repasser
NO planchar

DO NOT bleach
 NE PAS javeliser
NO utilizar lejía


DO NOT dry clean
 NE PAS faire nettoyer à sec
NO limpiar en seco

DO NOT machine dry
 NE PAS mettre dans une sécheuse
NO secar en secadora

P256900_R3:07.13

Crotch Rolls & Side Rolls

ANSWER:

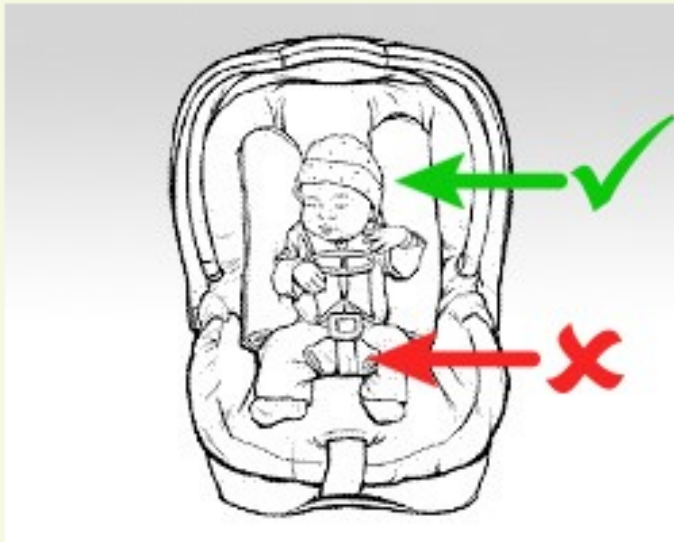

BRITAX rear-facing only and convertible car seats provide positioning inserts with the car seat. As well, offer multiple crotch buckle positions to assist in properly positioning and securing the child in the harness system.

If the positioning insert provided with the BRITAX car seat does not position the child as needed, it is acceptable to place a rolled receiving blanket on each side of the child for lateral support – once the child is properly secured within the harness as instructed in the user guide. The rolled receiving blankets should not be placed between the child and the harness.

It is **not** acceptable to use a crotch roll with any BRITAX car seat to position a child.



Replacement after a Motor Vehicle Crash

Discontinue use of this child seat if it has been in a moderate or severe crash. It is not necessary to replace a car seat after a minor crash, defined by the US National Highway Traffic Safety Administration (NHTSA) as:

- a. The vehicle is drivable from the crash site; and
- b. The vehicle door nearest the child seat was not damaged; and
- c. No vehicle occupants were injured; and
- d. There is no visible damage to the child seat; and
- e. The airbags (if present) did not deploy

This information can be found in each Britax product user guide in the WARNINGS or IMPORTANT NOTES section.

Coats | Heavy Clothing



BULKY COAT



LOOSE HARNESS

The following is in each BRITAX user guide in “Securing the Child”.

IMPORTANT: Remove bulky coats and/ or jackets before putting the child in the car seat.

- Some suggestions would be:
 - Preheat car.
 - Put jacket on backwards after child is secured in harness.
 - The B-WARM can be used with any Britax rear-facing only seat.

Accessory / Non-Regulated BY BRITAX FOR BRITAX



**B-Warm Insulated
Infant Car Seat Cover**



Vehicle Seat Protector



**Seat Saver Waterproof
Liner**

- Not just any item –
only made by Britax for Britax.
- You can find all Britax accessories by
visiting [us.Britax.com](https://us.britax.com)





**Head & Body Support
Pillow**



**EZ-Cling Window
Shades**

Use on Aircraft

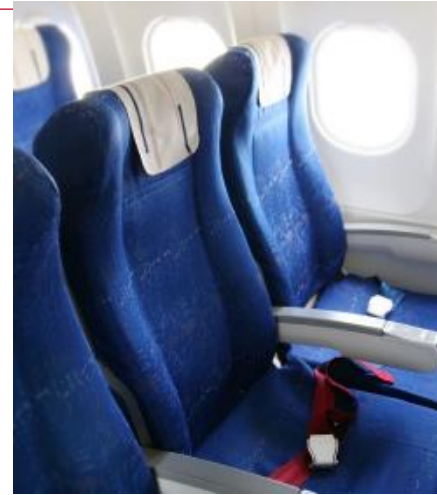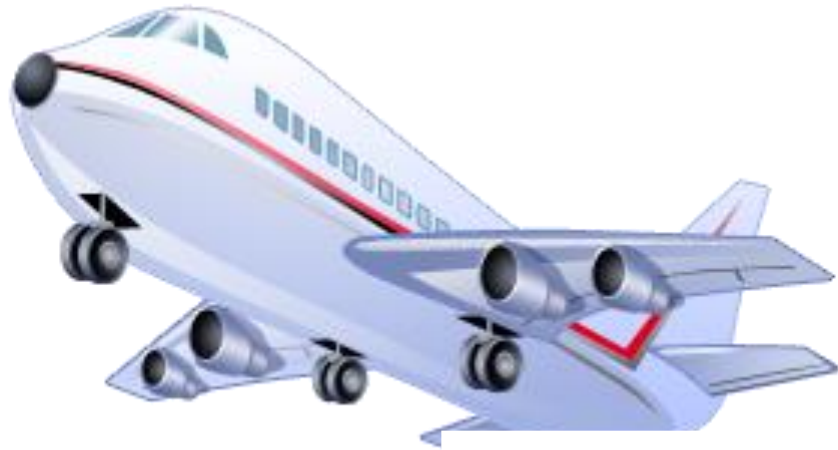

⚠ WARNING! DEATH OR SERIOUS INJURY can occur.

HARNESSES MODE • Use only in a rear-facing position when using it with an infant weighing less than 22 pounds (10 kg). • Use only with children who weigh between 5 and 65 pounds (2.3 and 29.5 kg) and with a height of 49 inches (124.5 cm) or less. • Rear-facing for children weighing between 5 and 50 pounds (2.3 and 22.7 kg) and forward-facing for children weighing between 22 and 65 pounds (10 and 29.5 kg). **BOOSTER MODE** • Use only with children who weigh between 40 and 120 lbs (18.1 and 54.4 kg) and whose height is between 44 and 63 inches (111.8 and 160 cm). • Snugly adjust the belts provided with this child restraint around your child. • Secure the top anchorage strap provided with this child restraint. • Use only the vehicle's lap and shoulder belt system when restraining the child in this booster seat. • Secure this child restraint with the vehicle's child restraint anchorage system, if available, or with a vehicle belt. • Follow all instructions on this child restraint and in the written instructions located in the pocket behind the cover of the child seat. • Register your child restraint with the manufacturer. • The provided infant positioning pillow **MUST** be removed for children weighing 20 lb (9.1 kg) or more.

✈ This child restraint system conforms to all applicable Federal Motor Vehicle Safety Standards. This Restraint is Certified for Use in Motor Vehicles and Aircraft when used in Harness Mode. This Restraint is Not Certified for Use in Aircraft when used in Booster Mode.

REAR-FACING INSTALLATION HARNESSES MODE	FORWARD-FACING INSTALLATION HARNESSES MODE
5 - 50 LBS (2.3 - 22.7 KG) Less than 49 in (124.5 cm)	22 - 65 LBS (10 - 29.5 KG) Less than 49 in (124.5 cm)
Lower Anchors Do not install by this method for a child weighing more than 30 lb (13.6 kg)	Lower Anchors Do not install by this method for a child weighing more than 35 lb (15.9 kg)
Lap-Shoulder Belt Lap Belt Only	Lap Belt Only Lap-Shoulder Belt

PD0717400 A-07-19

- Make sure your car seats is approved for use on aircraft. Look for statement on label:
 - This restraint is certified for use in motor vehicles and aircraft.
 - Belt-positioning booster seats a NOT approved for use on aircraft.
- Best practice is EVERY family member has a seat and is properly secured (seat belt or car seat. While the FAA allows children under the age of 2 to be held on lap, remember – turbulences are unexpected at any time.
- Call airlines and ask if there are discounts for seats for children flying during non-popular times or flights.
- By bringing YOUR car seat with you – you do not have to worry about renting a car seat from a car rental agency.

IMPORTANTE

En caso de una retirada, sólo podemos comunicarnos con usted si tenemos su nombre y dirección.
Usted **DEBE** enviar la tarjeta adjunta o registrarse en línea para estar en nuestra lista para productos con avisos de retiro del mercado a causa de defectos.

Nosotros ya hemos pagado el envío.
Hágalo hoy.

IMPORTANT

In case of a recall, we can reach you only if we have your name and address.
You **MUST** send in the attached card or register online to be on our recall list.

We've already paid the postage.
Do it today.



NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL
FIRST-CLASS MAIL PERMIT NO. 1262 CHARLOTTE, NC
POSTAGE WILL BE PAID BY ADDRESSEE

BRITAX CHILD SAFETY INC
PO BOX 91167
ALLENTOWN PA 18109-9925

**PARA LA SEGURIDAD DE SU NIÑO**

Por favor, tómese unos momentos para llenar y devolver la tarjeta adjunta o registre en línea a través del enlace directo a la página web del fabricante.

Aunque los asientos de seguridad para niños se someten a pruebas y evaluación, es posible que un asiento de seguridad para niños podría ser retirado del mercado.

En caso de una retirada, sólo podemos comunicarnos con usted si tenemos su nombre y dirección, así que por favor envíe la tarjeta o registre en línea para estar en nuestra lista de productos con avisos de retiro del mercado a causa de defectos.

Por favor, llene su tarjeta y envíela AHORA, o registre en línea en www.BritaxUSA.com/registration mientras que usted está pensando en ello.
La tarjeta ya está dirigida a Britax y hemos pagado los gastos de envío.

FOR YOUR CHILD'S CONTINUED SAFETY

Please take a few moments to promptly fill out and return the attached card or register online using the direct link to the manufacturer's website provided.

Although child restraint systems undergo testing and evaluation, it is possible that a child restraint could be recalled.

In case of recall, we can reach you only if we have your name and address, so please send in the card or register online to be on our recall list.

Please fill this card out and mail it NOW, or register online at www.BritaxUSA.com/registration, while you are thinking about it.
The card is already addressed and we've paid the postage.

Tear here / Desgarro aquí.

Consumer: Just fill in your name and address and e-mail address (optional)
Consumidor: Sólo tienes que escribir tu nombre y dirección y dirección de correo electrónico (opcional)

Name/Nombre

Address/Dirección

City/Ciudad

State/Estado

Zip/
Código Postal

Country/Pais

E-mail/Correo electrónico
(optional/opcional)

CHILD RESTRAINT REGISTRATION CARD
TARJETA DE REGISTRO PARA ASIENTOS DE SEGURIDAD PARA NIÑOS

R3:04:13

P478800

Always check to see if a CRS is affected by a Safety Notice & Register all Car Seats

- Visit the manufacturers website
 - Safety Notices
 - <http://www-odi.nhtsa.dot.gov/owners/SearchSafetyIssues?prodType=C>
 - <https://us.britax.com/service-support/safety-notice/>
- Register CRS
 - Reassure caregivers manufacturers cannot use their contact information for any reason other than to contact them in the event of a Safety Notice.
 - Mailing registration card
 - On-line
 - Call car seat manufacturer Customer Service
 - Number in user guide, label on car seat
 - <https://us.britax.com/support/register-product>

B-SAFE Series Resources

- [CLICK HERE](#) for B-Safe Gen2 Infant Car Seats: How to Install with Lower Anchors
- [CLICK HERE](#) for B-Safe Gen2 Infant Car Seats: How to Install using Vehicle Seat Belt (Lap-shoulder)
- [CLICK HERE](#) for B-Safe Gen2 FlexFit Infant Car Seats: How to Install without Base using European Belt Guide
- [CLICK HERE](#) for B-Safe Gen2 Infant Car Seat: How to Install without Base

- [CLICK HERE](#) for B-Safe 35 & 35 Elite Infant Car Seat w/ Base Installation Video with Locking Lap Belt
- [CLICK HERE](#) for B-Safe 35 & 35 Elite Infant Car Seat w/ Base Installation Video with Lap-Shoulder Belt
- [CLICK HERE](#) for B-Safe 35 & 35 Elite Infant Car Seat w/ Base Installation Video with Lower Connectors
- [CLICK HERE](#) for B-Safe 35 & 35 Elite Infant Car Seat w/o Base Installation Video with Locking Lap Belt
- [CLICK HERE](#) for B-Safe 35 & 35 Elite Infant Car Seat w/o Base Installation Video with Lap-Shoulder Belt

Additional Resources



Installation Videos (YouTube Channel)

<http://youtube.com/BritaxUSACarSeats>



Access the current BRITAX product user guides

<https://us.britax.com/support/instructional-videos-and-user-manuals>




Contact Britax Customer Service

888-427-4829 | Monday-Thursday 9 AM – 5:15 PM | Friday 9 AM – 4:45 PM



To determine lower anchor and/or tether capacity use by vehicle make.

<https://www.cpsboard.org/wp-content/uploads/2019/11/VM-LATCH-Anchor-Weight-Limits-2019-11.pdf>



Additional CEU material accessible through your profile at cert.safekids.org

Online CEUs → 3. Britax Tech Site → Obtain CEUs



Sarah Tilton, CPST-I

Director, Consumer Advocacy

Technician Discounts

Product Assistance as Technician/Instructor:



Email: Sarah.Tilton@Britax.com



Phone: (704) 409-1695



<https://www.facebook.com/britaxcpsti.sarahtilton>



Thank you for learning more about BRITAX!

- Please CLICK HERE to take the quiz for the Getting to Know Britax Rear-Facing ONLY Car Seats CEU Opportunity.
- Once you complete the quiz, you will receive your results via email.
- If you do not receive an email regarding your score in a timely fashion: (a) check your spam/junk folder and (b) consult your IT department that the system will allow emails from ceuquiz@britax.com.
- If you successfully completed the quiz, please save the email or print a copy and save with your recertification documentation.
- ✓ The emails come from wordpress@ceu.britaxusa.com. If you do not receive within 24-48 hours, please check your spam and junk folders. Some systems have been known not to deliver them to your inbox.
- ✓ Certificates/emails of completion cannot be re-created.
- If you did not successfully complete the quiz, please review the material again and retake the quiz when you are ready.