



Getting to Know the Britax One4Life All-In-One Car Seat with CLICKTIGHT

Continuing Education Unit

Getting to Know the Britax One4Life All-In-One Car Seat

- When you have completed this Continuing Education Unit session you will:
 - ✓ Have an understanding of the product features that the One4Life All-In-One Car Seat includes.
 - ✓ Be familiar with the weight, height and age requirements for the One4Life All-In-One Car Seat including use of the CLICKTIGHT Installation System.
 - ✓ Have a general understanding of the installation of One4Life All-In-One Car Seat rear-facing.
 - ✓ Have a general understanding of the installation of One4Life All-In-One Car Seat forward-facing.
- For this CEU opportunity, you must answer **16** out of **20** questions correctly in order to get the one (1) CEU awarded. If you incorrectly answer more than **4** questions, then you may review the material again and retake the quiz.
- Much of the information in this CEU material can be found at us.britax.com and in the user guide for the Britax One4Life.


The Car Seat
GAME CHANGER

CLICK  **TIGHT**
INSTALLATION

Why ClickTight® is a Game Changer

1.

Quick easy
access to the
belt path



2.

Installs simply
with just vehicle
seat belt




3.

Built-in tensioner eliminates
installation struggle



Snug as a Bug | ClickTight Car Seat Installation | Britax Video

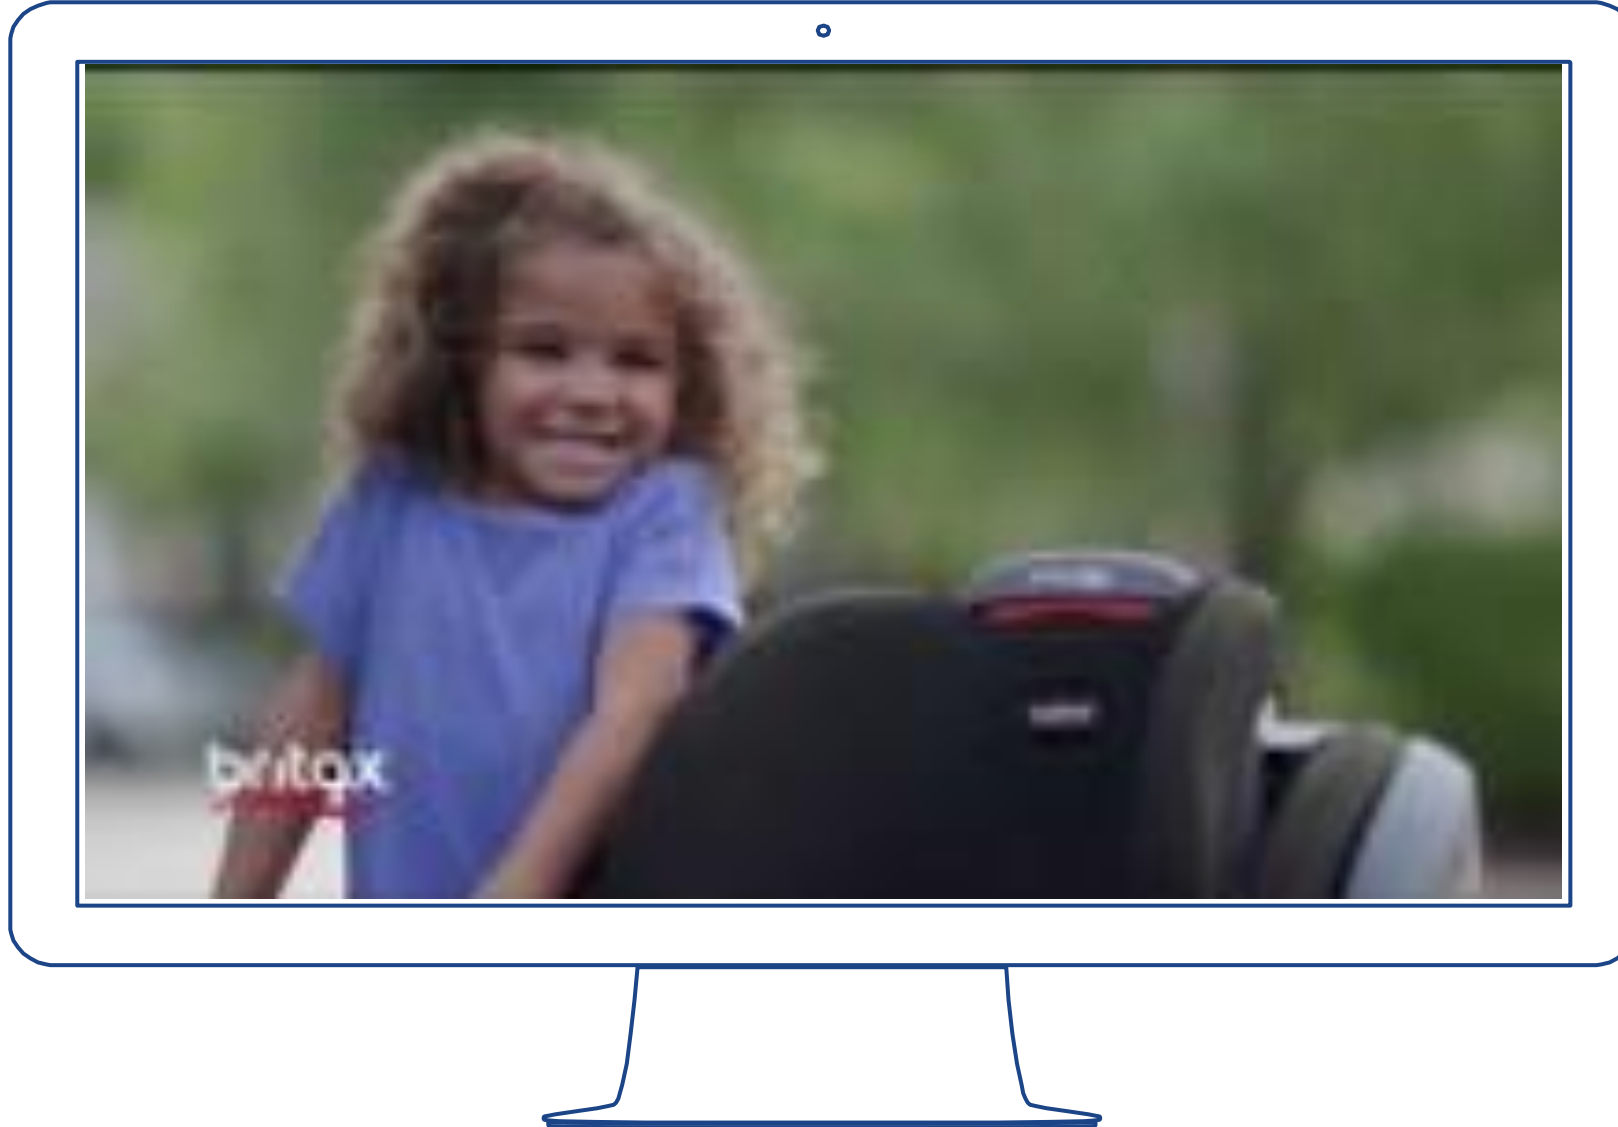

[CLICK HERE](#) to view video



CLICKTIGHT Installation Technology

1

CLICKTIGHT does not require any pushing or pulling to tension the vehicle belt or compress the vehicle seat.

2

Installation with a vehicle seat belt is preferred / recommended over lower anchors

3

ALWAYS release vehicle buckle BEFORE opening CLICKTIGHT when removing from vehicle.

britax

One4Life
one car seat for life



THE ONLY 10-YEAR
CAR SEAT WITH

CLICK TIGHT
INSTALLATION



Infant
5-20 lbs



Toddler
20-50 lbs



Preschool
22-65 lbs



Big Kid
40-120 lbs



One4Life

Rear-Facing to Forward-Facing to Booster Mode

FITS

Infant - Rear-Facing Harness Mode: 5 – 20 lbs, Up to 49”

Toddler - Rear-Facing Harness Mode: 20 – 50 lbs, Up to 49”

Preschool - Forward-Facing Harness Mode: 22 – 65 lbs, Up to 49”

Big Kid - Booster Mode: 40 – 120 lbs, 44” – 63”

(15) Harness & Headrest positions (in): 9”-19” (~7.5 w/ insert)

(3) Buckle Strap Positions (in): 5.5”, 6.75”, 8.75”

10 Year Expiration from date of manufacture



britax

One4Life Features



(15) Harness & Headrest positions (in): 9"-19" (~7.5 w/ insert)

(3) Buckle Strap Positions (in): 5.5", 6.75", 8.75"

Lower Connector (max child weight): 30 lb rear-facing | 35 lb forward-facing

Shoulder Width (in): 14 | Seat Area Depth / Width (in): 13.25 | ~19 overall cupholder to cupholder | 10 Year Expiration

One4Life Features



V-Shaped Tether



Steel Frame



SafeCell Technology



2 Layers Side Impact Protection



15-Position, Quick-Adjust Headrest & Harness



9-Position Recline



2-Dishwasher Safe Cup Holders




Naturally flame-retardant knit is safe to machine wash and dry.
us.Britax.com/pages/safewash



Buckle

There are three different buckle position slots. Adjust the buckle to the position closest to but not under the child. Never leave the buckle in the adjustment slot.

NOTE: If your child eats and drinks while in the child restraint, check the buckle periodically and clean out any accumulated debris (see page 55).

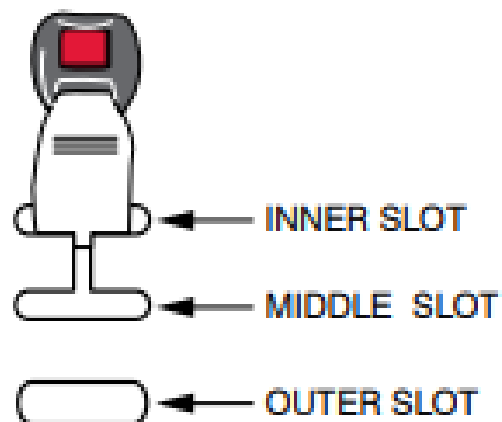

BUCKLE POSITION

Rear-Facing with Harness



REAR-FACING WITH HARNESS

Use only:

- with harness straps in closest position below the child's shoulders, and
- with children weighing 5 - 50 lb (2.3 - 22.7 kg), and
- when the top of child's head is at least 1 in (2.5 cm) below the top edge of headrest.

REAR-Facing Installation Harness Mode

Britax strongly recommends that children should ride REAR-facing until they exceed the weight or height limits specified.


Use REAR-facing only:

- with harness straps in closest position below the child's shoulders, *and*
- with children weighing 5 - 50 lb (2.3 - 22.7 kg), *and*
- when the top of child's head is at least 1 in (2.5 cm) below the top edge of headrest.



For models with anti-rebound bar:

Follow the instructions on page 17 to attach the anti-rebound bar to the child restraint before installing.




Rear-Facing with Harness



Infant Insert Pillow

The infant insert can be used with infants weighing 20 lb (9.1 kg) or less. Do not use with infants more than 20 lb (9.1 kg).



Headrest Cover


The headrest cover must be unfolded for infants weighing 20 lb (9.1 kg) or more.



Cup Holders

Anti-Rebound Bar

- Select Models will include the Anti-Rebound Bar (ARB).
- The use of the ARB is optional in the United States, it is not required.
- The ARB can be purchased as an accessory.

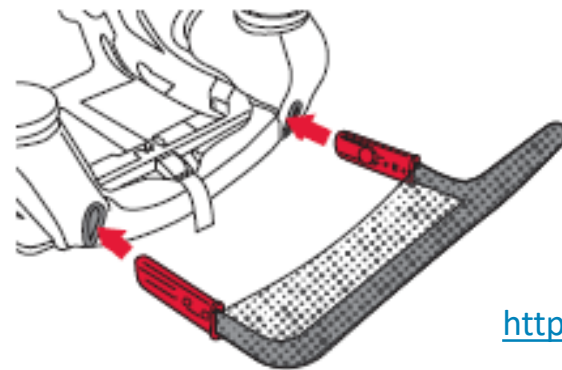


<https://us.britax.com/accessories/one4life-anti-rebound-bar/>

britax


When using the Anti-Rebound Bar (ARB)

Installing the Anti-Rebound Bar


1. **Open** the CLICKTIGHT door. **Squeeze** the CLICKTIGHT release buttons underneath the front cover flap and lift to open.

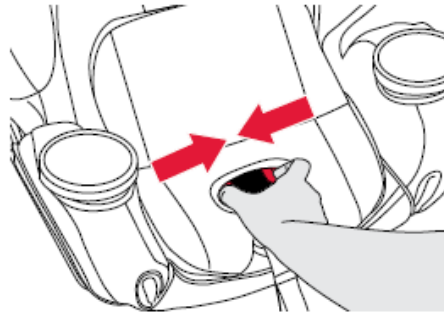

2. **Insert** the anti-rebound bar into the two openings at the front of the seat.

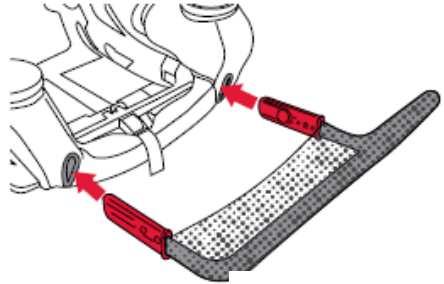

3. **Attach** elastic bands from the cover to the hooks on the shell.


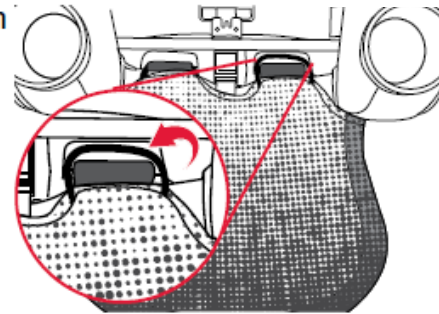


4. **Pull** the anti-rebound bar away from child restraint on both sides to confirm connections.

See the user guide and videos for more details.

Removing the Anti-Rebound Bar

1. **Open** the CLICKTIGHT door.
2. **Unhook** elastic bands from the front of the seat.
3. **Push** the inner red button. **Pull** the anti-rebound bar away on one side. Repeat on the other side.

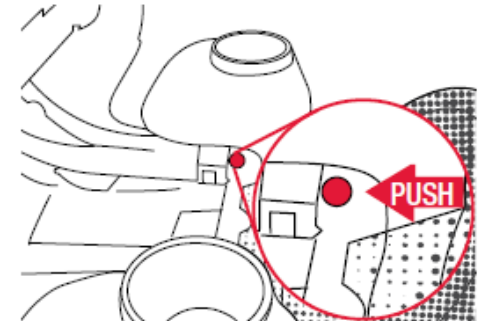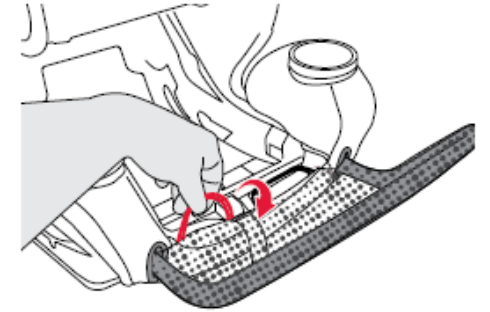

For models with anti-rebound bar, the anti-rebound **MUST** be removed for FORWARD-facing.

2020 Honda CR-V

The space between ARB & vehicle seat back will vary depending on recline position
One4Life is set in AND the vehicle seat slope
AND the vehicle seat back angle.



23-24" from seat bight








Achieving the appropriate recline – Rear-Facing

Recline Button and Recline Indicator

Recline Guide

Booster mode **MUST** be used in recline position "B".


Rear-Facing no neck control  Rear-Facing neck control  or 


Forward-Facing  Not Acceptable 


Always refer to user guide for instructions and warnings.

BOOSTER MODE
40 - 120 LBS (18.1 - 54.4 KG)
44 - 63" (111.8 - 160 CM)


The vehicle shoulder belt should lay straight across chest. The vehicle lap belt should lay low across upper thigh. The shoulder belt guides are positioned above child's shoulders.

 Only use lap-shoulder belt with the booster seat.

WARNING
 DO NOT use lap belt only in booster mode 

LATCH 


R09718100_A07.19

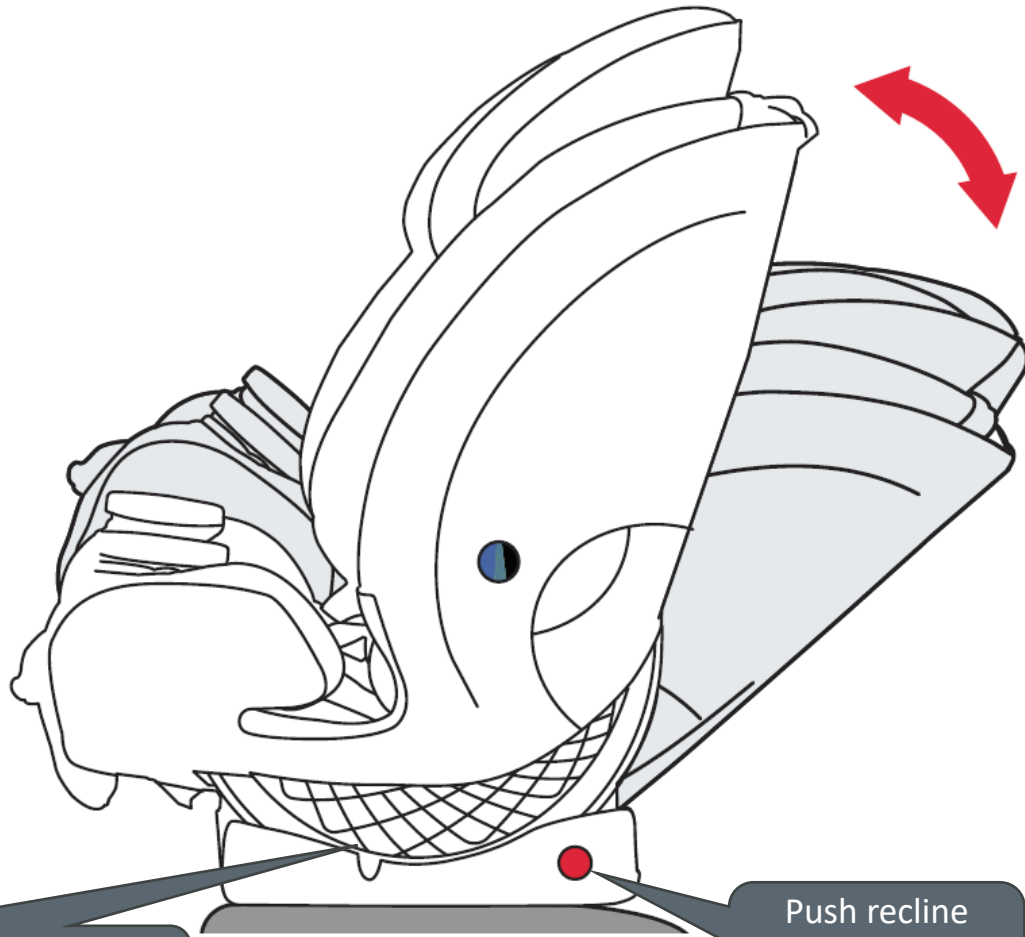

REAR-FACING HARNESS INSTALLATION



For infants with NO head and neck control:
 Recline indicator arrow tip must be in solid blue section.
 Recline indicator arrow tip can NOT be in the stripe blue-green or black sections.

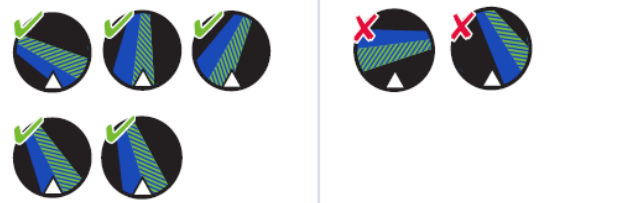


For children with head and neck control:
 Recline indicator arrow tip must be either in solid blue section or striped blue-green section.
 Recline indicator arrow tip can NOT be in the black sections.

Use any position 1-8 that places the tip of arrow in the appropriate are for child's development. Do Not use "B" position in harness mode.

Push recline button on either side

Can a pool noodle be used with One4Life?



A pool noodle or rolled towel should ONLY be used if the child does NOT have head and neck control and you are unable to achieve proper installation **REAR**-facing with the base flat and parallel to the vehicle seat with the recline indicator arrow tip in the solid blue section. When using a pool noodle or towel to place the recline indicator arrow tip in the solid blue section, you must ensure the car seat is **REAR**-facing in recline position 1.

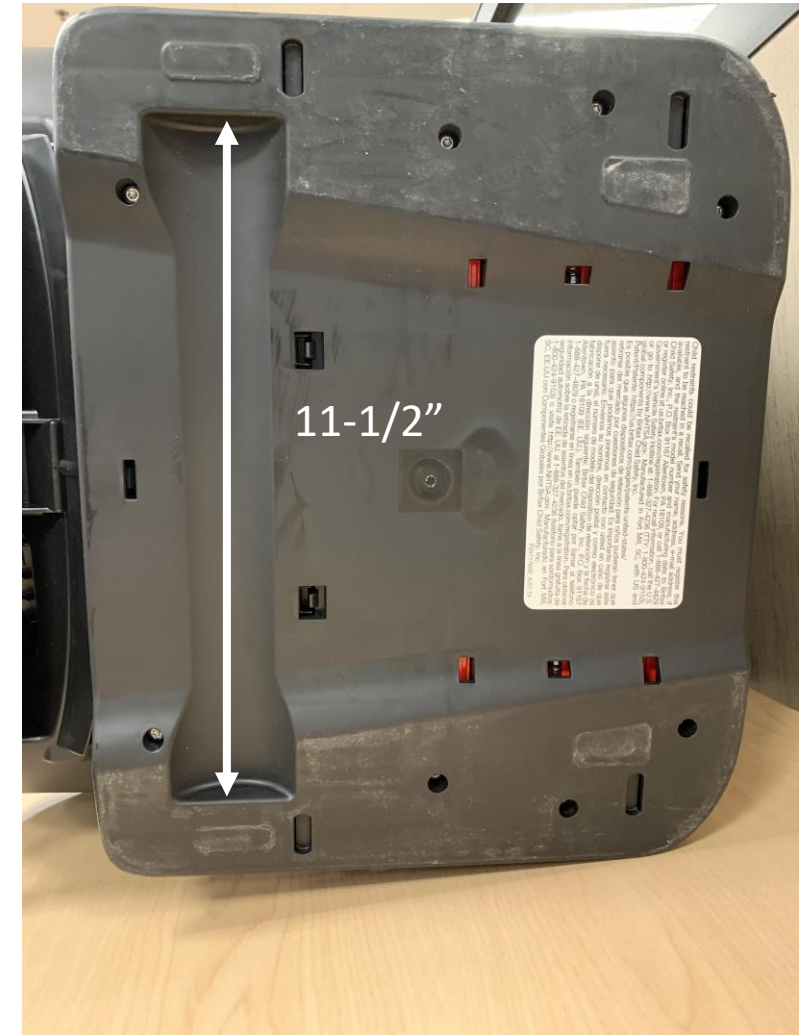

User Guide P14211900_A:06.21

Can a pool noodle be used with One4Life?

The edge of the base will not be touching the vehicle seat back and the noodle will not fall exactly in the bight of the seat.

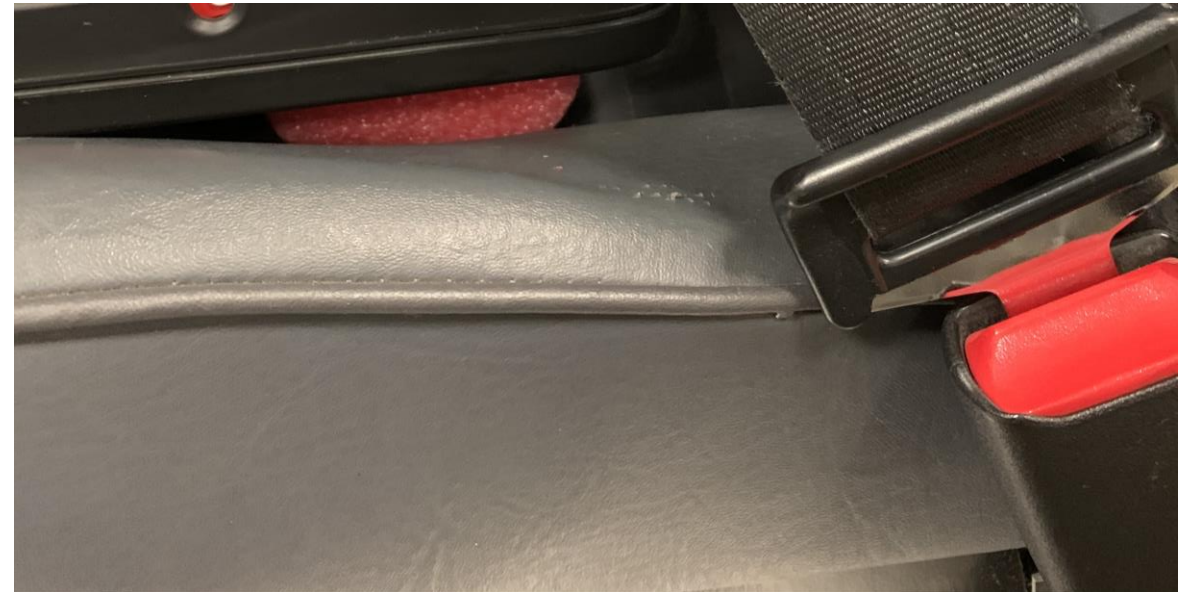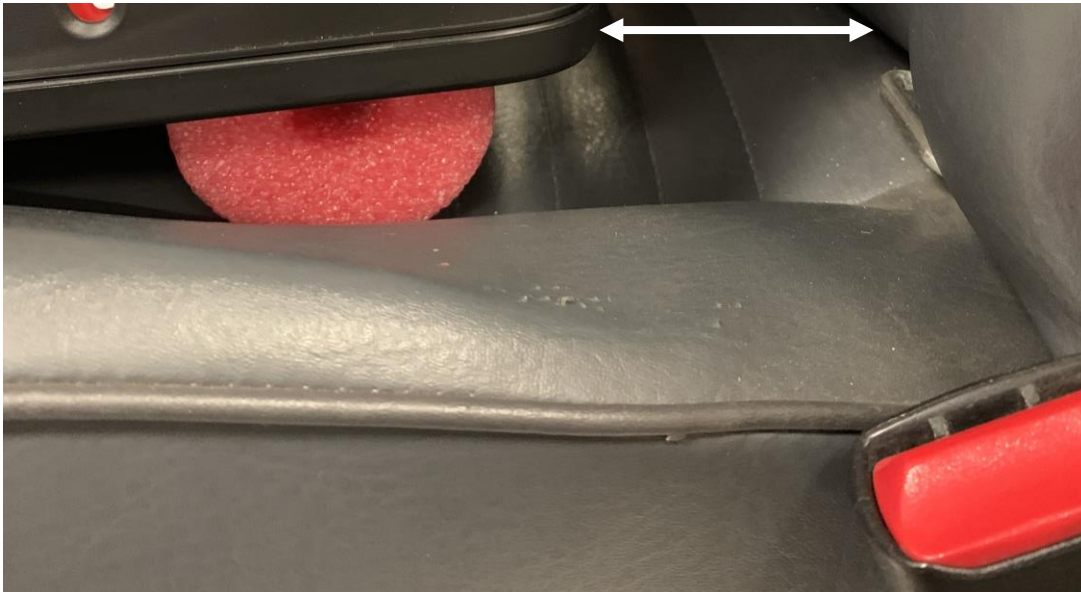

Forward-Facing with Harness



FORWARD-FACING WITH HARNESS

Use only:

- with harness straps in closest position above the child's shoulder, and
- with children weighing 22 - 65 lb (10 - 29.5 kg), and
- who are 49 in (124.5 cm) or less in height, and
- when the top of the ears are below the top of headrest.

FORWARD-Facing Installation Harness Mode

Britax strongly recommends:

- children should ride **REAR**-facing until they exceed the weight or height limits specified.
- the top tether be used at **ALL** times when installing the child restraint **FORWARD**-facing. Using the top tether will improve the stability of your child restraint and reduce the risk of injury.

Use **FORWARD**-facing only:

- with harness straps in closest position above the child's shoulder, **and**
- with children weighing 22 - 65 lb (10 - 29.5 kg), **and**
- who are 49 in (124.5 cm) or less in height, **and**
- when the top of the ears are below the top of headrest.








IMPORTANT: Anti-rebound bar **MUST** be removed forward-facing.

Achieving the appropriate recline – Forward-Facing

Recline Button and Recline Indicator

Recline Guide


Booster mode **MUST** be used in recline position "B".


Rear-Facing no neck control 	Rear-Facing neck control  or 
Forward-Facing 	Not Acceptable 


Always refer to user guide for instructions and warnings.

BOOSTER MODE
40 - 120 LBS (18.1 - 54.4 KG)
44 - 63" (111.8 - 160 CM)


The vehicle shoulder belt should lay straight across chest. The vehicle lap belt should lay low across upper thigh. The shoulder belt guides are positioned above child's shoulders.

 Only use lap-shoulder belt with the booster seat.


WARNING
 DO NOT use lap belt only in booster mode 

LATCH 

R09718100 A07.19

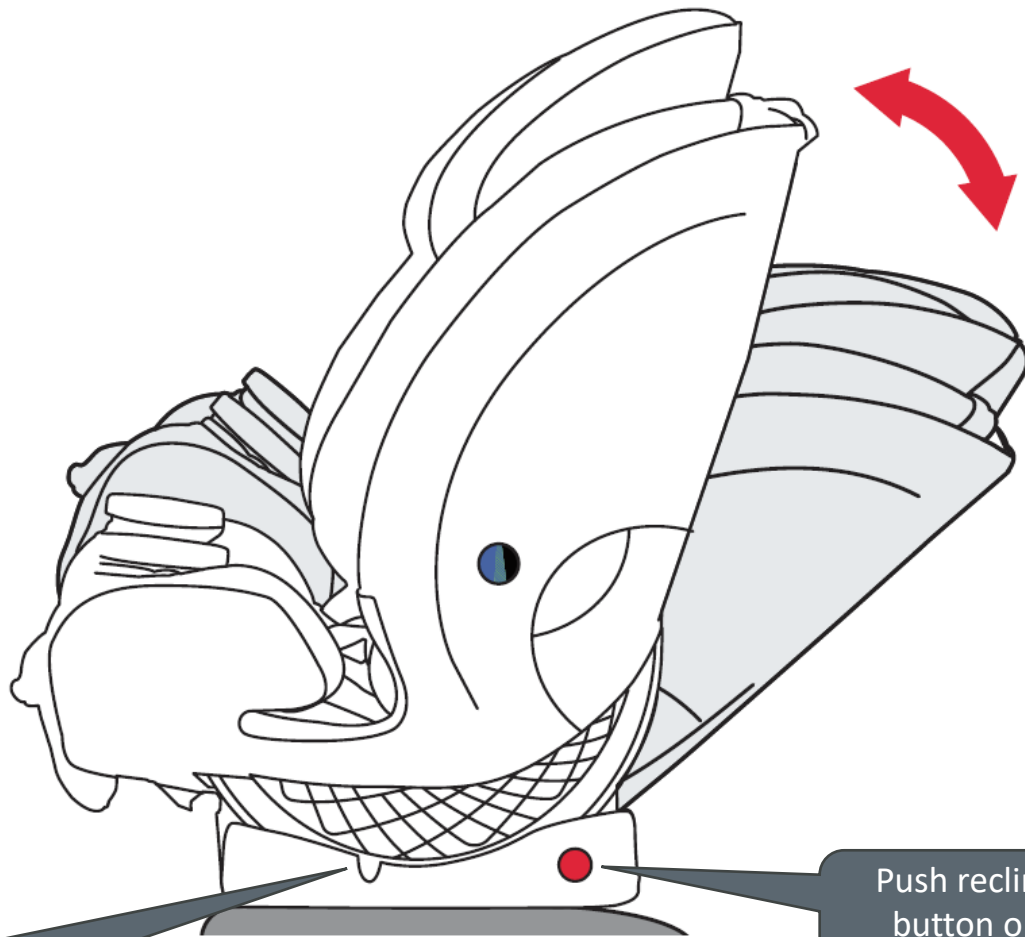

FORWARD-FACING HARNESS INSTALLATION

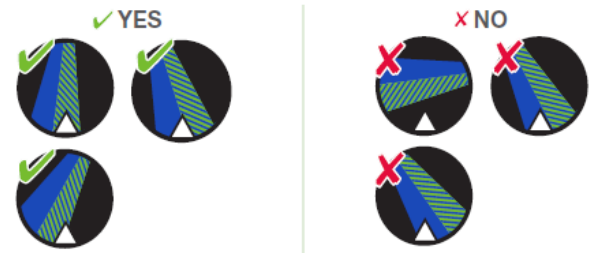

Recline indicator arrow tip must be in striped blue-green section.

Recline indicator arrow tip can NOT be in the solid blue or black sections.

NOTE: Do Not use "B" position when using the seat in harness mode.

Push recline button on either side

Recline can be used forward-facing as long as:
 (a) Arrow point in blue-green area
AND
 (b) No more than 3" of overhang

For Harness Mode: Use any position 1-8 that places the tip of arrow in the appropriate area for child's development. Do Not use "B" position in harness mode.

Booster Mode



BOOSTER MODE

Use only:

- in recline position “B”, and
- with children who weigh 40 - 120 lb (18.1 - 54.4 kg), and
- when top of child’s ears are **BELOW** the top of headrest, and
- when the lap belt sits low across child’s upper thighs when routed through the belt guide, and
- when the vehicle shoulder belt lays straight across the child’s chest, and
- when the shoulder belt guides are positioned above the child’s shoulders.



IMPORTANT: Britax strongly recommends that children should remain in a child seat with a 5-point harness until reaching the maximum weight or height allowed.

Use in **BOOSTER** mode only:






- in recline position “B”, **and**
- with children who weigh 40 - 120 lb (18.1 - 54.4 kg), **and**
- when top of child’s ears are **BELOW** the top of headrest, **and**
- when the lap belt sits low across child’s upper thighs when routed through the belt guide, **and**
- when the vehicle shoulder belt lays straight across the child’s chest, **and**
- when the shoulder belt guides are positioned above the child’s shoulders.



Achieving the appropriate recline – Booster Mode

Recline Guide


Booster mode **MUST** be used in recline position "B".


Rear-Facing no neck control 	Rear-Facing neck control  or 
Forward-Facing 	Not Acceptable 


Always refer to user guide for instructions and warnings.

BOOSTER MODE
40 - 120 LBS (18.1 - 54.4 KG)
44 - 63" (111.8 - 160 CM)

The vehicle shoulder belt should lay straight across chest. The vehicle lap belt should lay low across upper thigh. The shoulder belt guides are positioned above child's shoulders.


 Only use lap-shoulder belt with the booster seat.

WARNING
DO NOT use lap belt only in booster mode 

LATCH 

P02718/100 A07/19

Recline Button and Recline Indicator

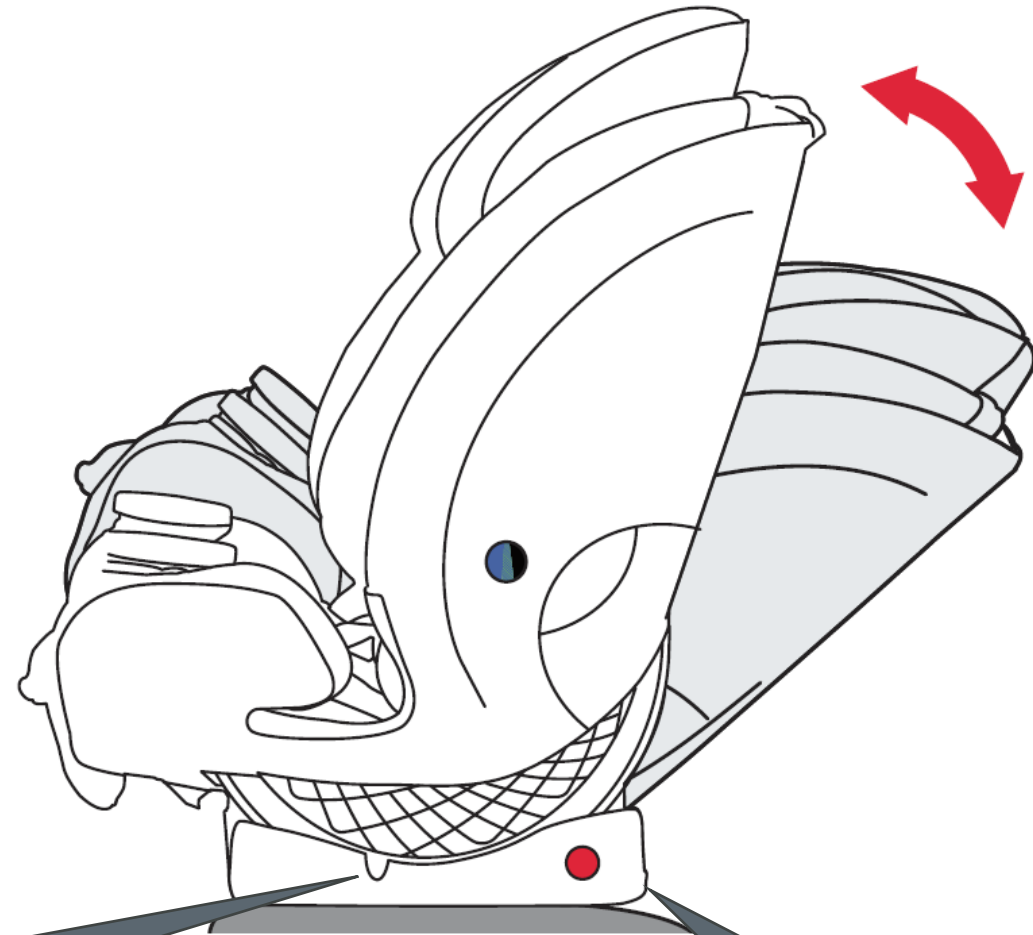

IMPORTANT: Recline **MUST** be in position "B" when seat is used in **BOOSTER** mode.

Reclining the Seat in **BOOSTER** Mode

Push the recline button on either side of the base and rotate the child restraint to position "B".



ONLY position "B" (most upright) can be used in Booster Mode.


Push recline button on either side



Can the One4Life be positioned with LATCH in booster mode?

- Yes, both lower anchors and tether.
- Ensure that the LATCH system does not interfere with the vehicle belt function and alignment when securing your child.
- If the Lower anchors are offset from the centerline of vehicle seat belt, it would not be acceptable.



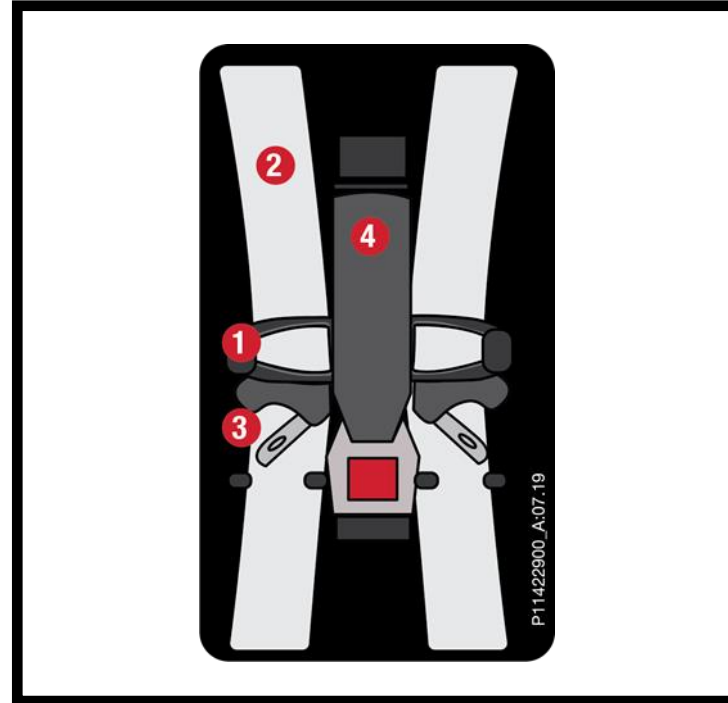


STORING HARNESS FOR BOOSTER MODE



Date of manufacture August 2019 through ~ September 10, 2020



10. Locate the space in-between the back of the shell and the back-top part of the seat pan.


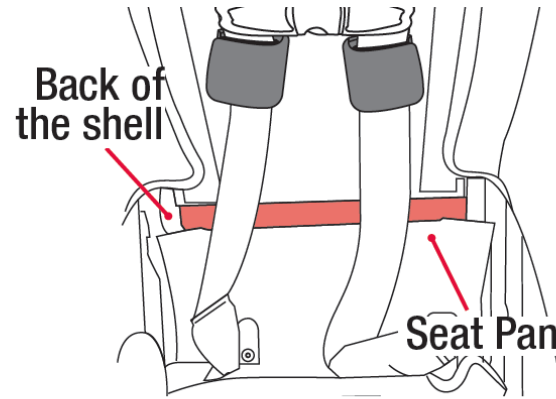


11. Tuck in the buckle tongues and comfort pads, pushing them with force down into the gap until the chest clip and excess webbing are no

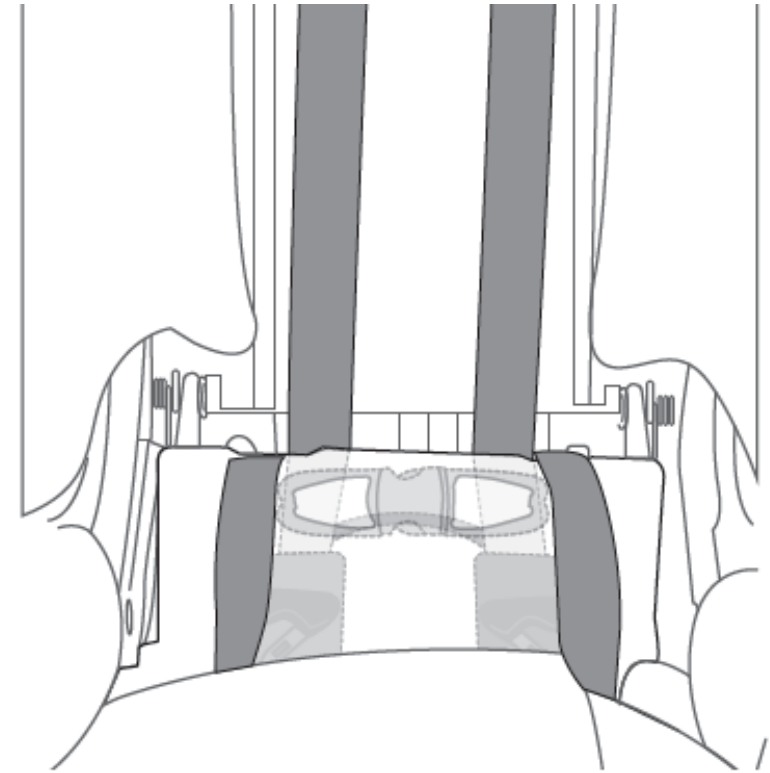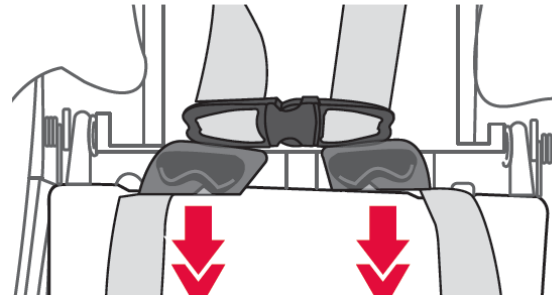

STORING HARNESS FOR BOOSTER MODE



Date of manufacture ~ September 11, 2020 to current

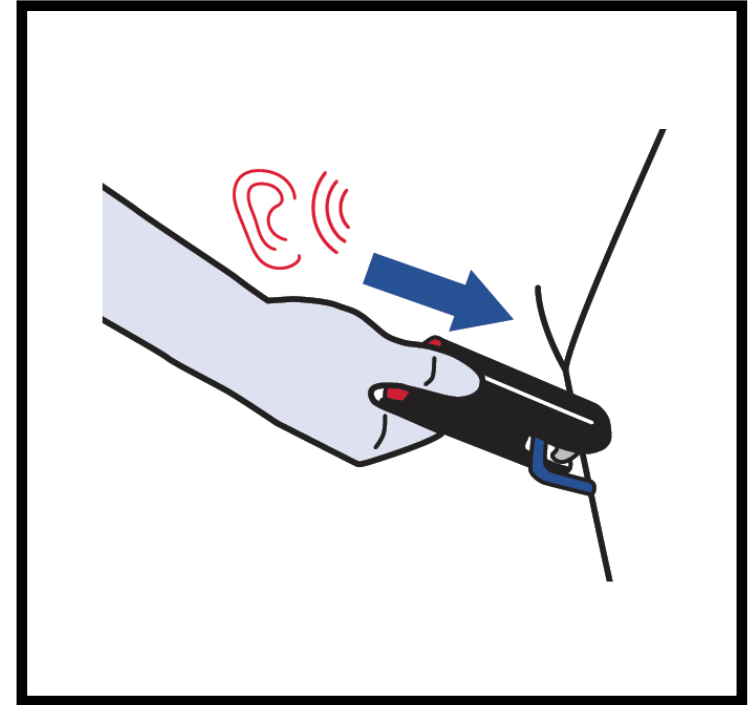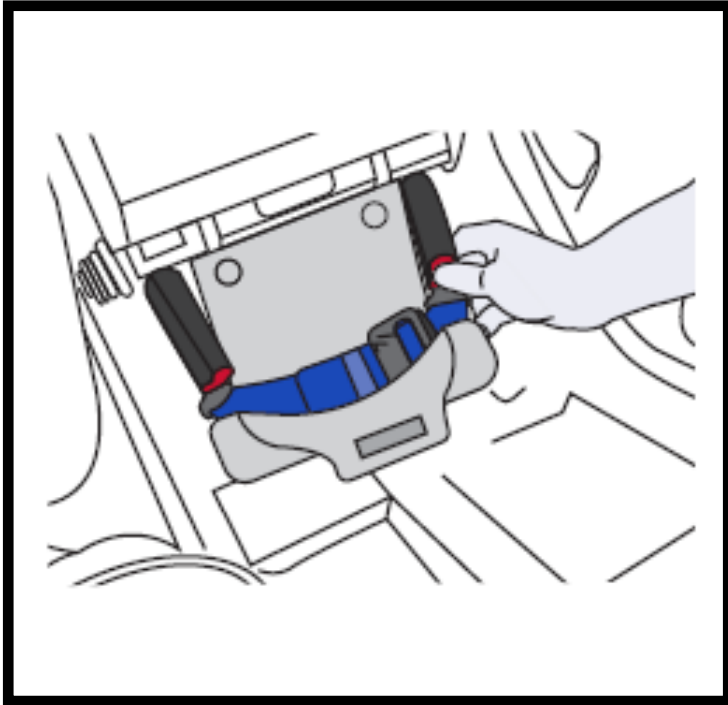

LOWER CONNECTORS

Date of manufacture August 2019 through ~ November 20, 2020



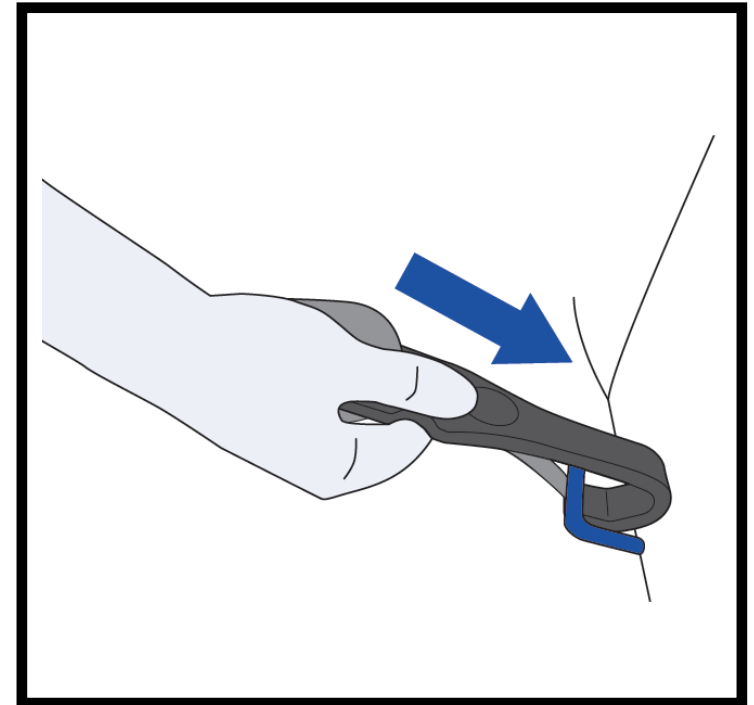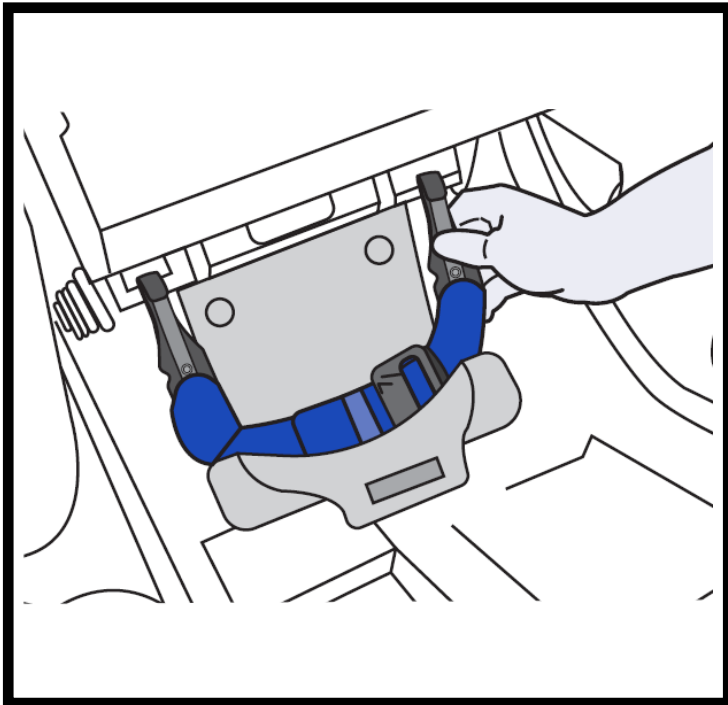

LOWER CONNECTORS

Date of manufacture ~ November 21, 2020 through current

Use of LATCH with the One4Life

⚠ WARNING! DEATH or SERIOUS INJURY can occur.

HARNES MODE • Use only in a rear-facing position when using it with an infant weighing less than 22 pounds (10 kg). • Use only with children who weigh between 5 and 65 pounds (2.3 and 29.5 kg) and with a height of 49 inches (124.5 cm) or less. • Rear-facing for children weighing between 5 and 50 pounds (2.3 and 22.7 kg) and forward-facing for children weighing between 22 and 65 pounds (10 and 29.5 kg). **BOOSTER MODE** • Use only with children who weigh between 40 and 120 lbs (18.1 and 54.4 kg) and whose height is between 44 and 63 inches (111.8 and 160 cm). • Snugly adjust the belts provided with this child restraint around your child. • Secure the top anchorage strap provided with this child restraint. • Use only the vehicle's lap and shoulder belt system when restraining the child in this booster seat. • Secure this child restraint with the vehicle's child restraint anchorage system, if available, or with a vehicle belt. • Follow all instructions on this child restraint and in the written instructions located in the pocket behind the cover of the child seat. • Register your child restraint with the manufacturer. • The provided infant positioning pillow **MUST** be removed for children weighing 20 lb (9.1 kg) or more.



This child restraint system conforms to all applicable Federal Motor Vehicle Safety Standards. **This Restraint is Certified for Use in Motor Vehicles and Aircraft when used in Harness Mode. This Restraint is Not Certified for Use in Aircraft when used in Booster Mode.**

**REAR-FACING
INSTALLATION HARNES MODE**
5 - 50 LBS (2.3 - 22.7 KG)
Less than 49 in (124.5 cm)

**FORWARD-FACING
INSTALLATION HARNES MODE**
22 - 65 LBS (10 - 29.5 KG)
Less than 49 in (124.5 cm)

Harness straps in closest position below the child's shoulders





Harness straps in closest position above the child's shoulders



Lower Anchors
Do not install by this method for a child weighing more than 30 lb (13.6 kg)

Lap-Shoulder Belt




Lap Belt Only



Lap Belt Only

Lap-Shoulder Belt

Lower Anchors
Do not install by this method for a child weighing more than 35 lb (15.9 kg)



P09717400_A-07.19

➤ **LAP-SHOULDER SEAT BELT INSTALLATIONS ARE PREFERRED.**

➤ If / when installed in harness mode with LATCH:

- ✓ Rear-Facing: Do NOT install by this method for a child weighing more than 30 lb (13.6 kg).
- ✓ Forward-Facing: Do NOT install by this method for a child weighing more than 35 lb (15.9 kg).

Where is the serial number and date of manufacturer located on the One4Life?




Belt Path Identification



The blue and red label indicating the belt path for rear-facing and booster mode is not indicating the lap portion must be only in that colored area applicable to mode of use. It is identifying that is the belt path for two modes of use.

Tether attached during an impact?




This is one indicator the seat should be replaced.

Can a Britax car seat be installed in the center seating position borrowing the inner anchors (LATCH) of the outboard seating positions?

No. To use lower anchors / LATCH, it must be a designated LATCH position by the vehicle with standard spacing.


Using the Lower Anchors and Tethers for Children (LATCH)

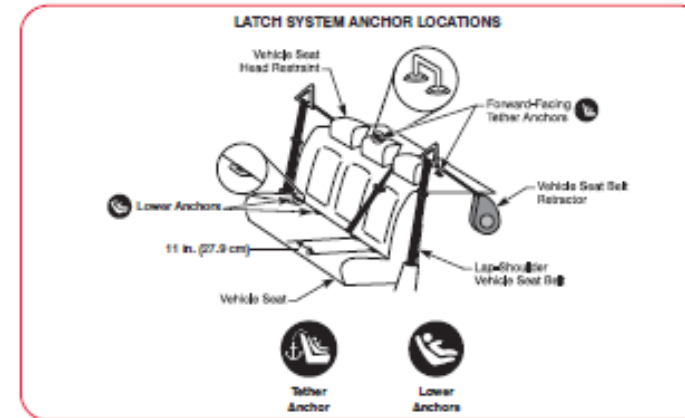

The Lower Anchors and Tethers for Children or LATCH, is a system available on this child restraint that offers an alternative to vehicle seat belt installation methods. The figure above shows typical locations for lower anchors and tether anchors in a vehicle. See pages 2-3 for LATCH components on this child restraint.

→ Check your vehicle owner's manual to learn if it is equipped with LATCH, the maximum weight rating for the lower anchors, tether anchors capacities, and information on the lower anchor locations and designated seating positions available for use with this child restraint.

Tether anchor locations vary from vehicle to vehicle. Check your vehicle owner's manual and look for the tether anchor symbol shown in the diagram to help identify where the top tether anchor point is located in your vehicle.




How much overhang is acceptable with any Britax car seat?

Harness Mode

- It is important that the base of the child restraint rests completely flat on the vehicle seat with no side overhang.
- It is permissible to allow up to 3 in. (7.6 cm) of the base to hang over the front edge of the vehicle seat.
- Side overhang is not permitted.

Booster Mode

- Overhang is not allowed in booster mode. In booster mode, the base of the child restraint must fit completely on the vehicle seat.
- Side overhang is not permitted.

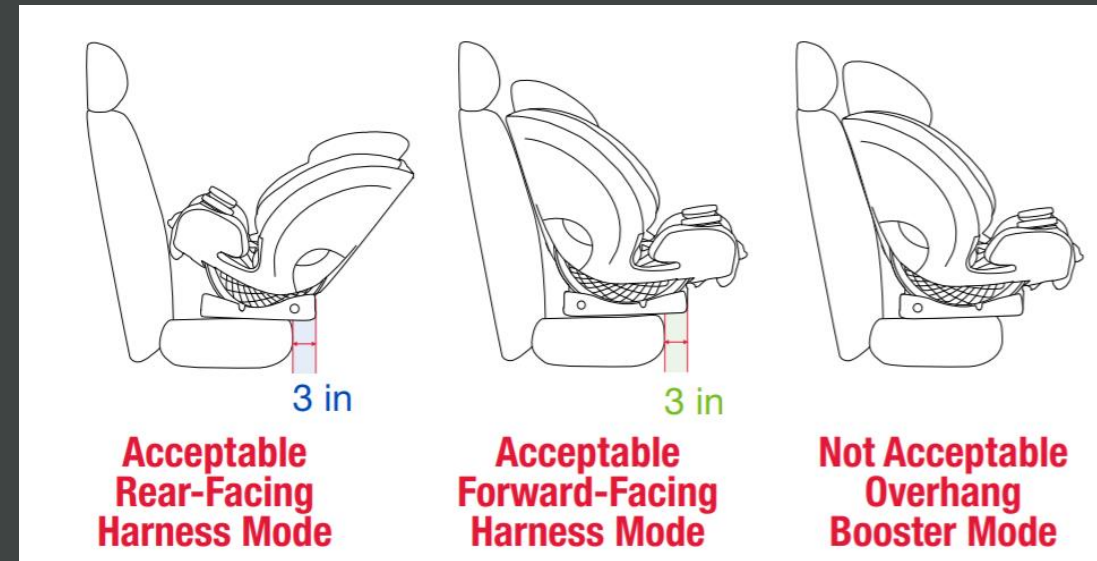

When do Britax car seats expire?

Safety Information

Warnings

⚠ WARNING!

Failure to follow all warnings and instructions on the restraint system could result in **SERIOUS INJURY** or **DEATH**.

Carefully read all the instructions in this user guide and on the child restraint before using this product. Keep this user guide in the user guide storage pocket under the seat cover for future use.

FIT REQUIREMENTS

- Use **ONLY** in **REAR**-facing position when using it with an infant weighing less than 22 lb (10 kg).
- Use in harness mode **ONLY** with children who weigh between 5 and 65 lb (2.3 and 29.5 kg) and whose height is 49 in (124.5 cm) or less.
- Use **REAR**-facing for children who weigh between 5 and 50 lb (2.3 and 22.7 kg).
- Use **FORWARD**-facing with a harness for children who weigh between 22 and 65 lb (10 and 29.5 kg).
- Use in **BOOSTER** mode only with children who weigh between 40 and 120 lb (18.1 and 54.4 kg) and whose height is between 44 and 63 in (111.8 and 160 cm).

INSTALLATION

- Secure the top tether strap provided with this child restraint for **FORWARD**-facing harness mode.
- Car seat base **MUST** be flat on vehicle seat and **MUST** be parallel to vehicle seat.
- Snugly adjust the belts provided with this child restraint around your child.
- Use only the vehicle's lap and shoulder belt system when restraining the child in this **BOOSTER** seat. Never secure a child with a lap belt only in **BOOSTER** mode.
- Use only the "B" recline position when using child restraint in **BOOSTER** mode.
- For models with anti-rebound bar, the anti-rebound bar **MUST** be removed for **FORWARD**-facing.

GENERAL USE

- Secure this child restraint with the vehicle's child restraint anchorage system, if available, or with a vehicle seat belt.
- Register your child restraint with the manufacturer.
- The headrest cover **MUST** be unfolded for children weighing 9.1 kg (20 lb) or more.
- The provided infant position pillow **MUST** be removed for children weighing 9.1 kg (20 lb) or more.
- When not in use, the lower anchor adjuster and strap **MUST** be stored in the storage pouch inside of the seat.

NOTES:

- Britax strongly recommends that children should remain in a child seat with a 5-point harness until reaching the **maximum weight or height allowed**.
- To prevent injury due to deterioration or hidden damage, discontinue use of this child restraint if it is older than ten (10) years. See the Serial Number and Manufactured Date Label on the child restraint.
- Before each use, check this child restraint and its components to make sure they are in good condition and good working order.
- Discontinue use of this child restraint if it has been in a moderate or severe crash. It is not necessary to replace a child restraint after a **minor** crash, defined by the US National Highway Traffic Safety Administration (NHTSA) as:
 - The vehicle is drivable from the crash site; **and**
 - The vehicle door nearest to the child restraint was not damaged; **and**
 - No vehicle occupants were injured; **and**
 - There is no visible damage to the child restraint; **and**
 - The airbags (if present) did not deploy.
- ALWAYS** make sure the child restraint system is secured to the vehicle, even when unoccupied, since in a crash, an unsecured child restraint system may injure occupants.
- Verify that the child restraint and child restraint belts or straps do not interfere with the opening and closing of the vehicle door.
- Consult vehicle user guide to ensure child restraint installation does not interfere with function of vehicle seats.
- Snugly adjust the belts provided with the child restraint around your child.
- Ensure the lower harness (waist) straps are firmly adjusted in a position so that the child's pelvic area is secure.
- Ensure the upper harness (shoulder) straps are firmly adjusted so that the child is secure.
- The use of non-Britax covers, inserts, toys, accessories or tightening devices is not approved by Britax. Their use could cause this child restraint not to perform as intended in a crash.
- Cover the child restraint when the vehicle is parked in direct sunlight. Metal parts of child restraint could become hot enough to burn a child.
- Store the child restraint in a cool and dry place when it is not being used. Avoid placing heavy objects on top of it.
- Do not attempt to disassemble any part of the child restraint or change the way the harness or vehicle's seat belts are used, except as described in this booklet.

The statement for number of years will be found in the Warnings / Note section of user guide.

For newer models, it can also be found on the serial number label.



XXXXXXXXXXXXXXXXXXXXX	MANUFACTURED
MODEL: XXXXXXXXXXXXX	FABRICADOS:
BATCH/LOTE: XXXXXXXXXX	09 2018
SERIAL/SERIE: XXXXXXXXXXXXX	MO/MES YR/AÑO
EXPIRES/EXPIRS: 09/31/2024	
MANUFACTURED BY/FABRICADOS POR:	
BRITAX CHILD SAFETY, INC.	
4140 PLEASANT RD. FORT MILL, SC 29708 USA	



Installation of a BRITAX car seat when vehicle head restraint causes interference.

Vehicle Headrest

! WARNING!

In some cases, the vehicle headrest can prevent the child restraint headrest from being raised high enough to properly adjust the harness for the fit of your child when using a forward-facing reclined position. **DO NOT** force the child restraint headrest past the vehicle headrest. Doing so could cause the child restraint not to perform as intended. If the location of the vehicle headrest interferes with the child restraint headrest, raise or remove the vehicle headrest. If the vehicle headrest can not be removed, move the child restraint to the upright position or try a different seating location.




Can Britax car seats and booster seats be installed with Inflatable Seat Belts?

Please see our Inflatable Seat Belt Policy – <https://us.britax.com/service-support/inflatable-seat-belt-policy/>

Not all models of BRITAX car seats are approved for use with inflatable seat belts. At this time, ONLY the Ford Motor Company (Ford and Lincoln vehicles) Inflatable seat belt system is approved for use with the following BRITAX models: **B-SAFE, Britax G Series Convertibles (Roundabout, Marathon, Boulevard, Advocate), Pioneer 70, Pioneer, Frontier, Frontier 85, Frontier 90, Frontier CLICKTIGHT, Pinnacle 90, Pinnacle CLICKTIGHT, Parkway SG and Parkway SGL.**

If your car seat model is not listed above, it is NOT approved for use with the Ford inflatable seat belt system or any other inflatable seat belt system.

For more information on Inflatable seat belts, please [click here](#).

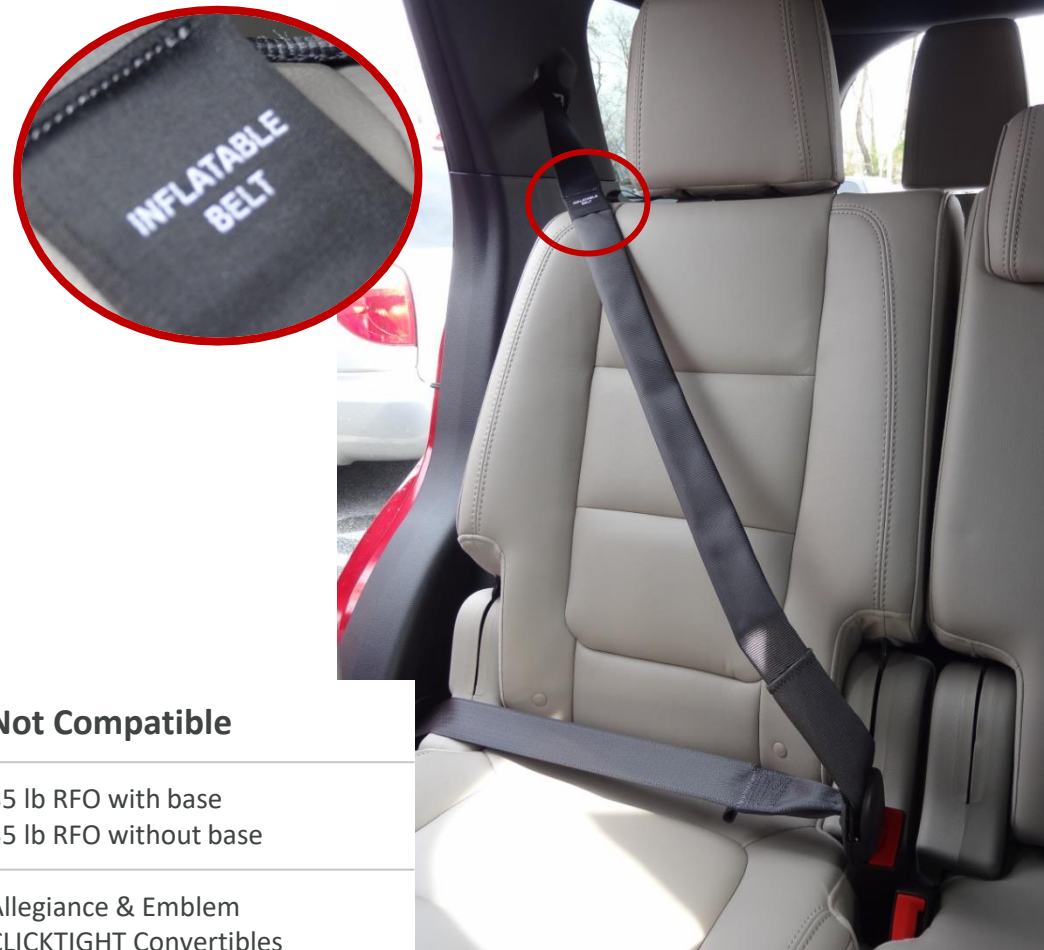

In User Guides | COMPATIBLE SEAT BELTS

NOTE:

This BRITAX car seat may not be compatible with every inflatable lap-shoulder belt.

See FAQs in the support section of the BRITAX website (<https://www.britax.ca/faqs> OR <https://us.britax.com/faqs/installation-questions/>) for additional instructions.


Compatible	Not Compatible
B-SAFE (30 lb. capacity)	35 lb RFO with base 35 lb RFO without base
G Series Convertibles	Allegiance & Emblem CLICKTIGHT Convertibles
Pioneer Frontier CLICKTIGHT Pinnacle CLICKTIGHT	DualFit Grow With You Grow With You CLICKTIGHT Grow With You CLICKTIGHT PLUS One4Life
Parkway SG & SGL	Highpoint, Midpoint & Skyline





How do I clean my soft goods (covers)?


- ONLY SafeWash covers by Britax are machine washable and machine dryable.
- USER GUIDE Cleaning Instructions:
 - Refer to product care label for wash instructions.
 - If care label indicates machine washable, always refer to us.britax.com/faqs for important care information.


Care Instructions
Instructions d'Entretien
Instrucciones de Cuidado

Machine wash cold, delicate cycle with mild soap
 Laver à la machine à l'eau froide, cycle délicat avec savon doux
Lave a máquina con agua fría, ciclo de ropa fina con jabón suave

Tumble dry low
 Sécher à la machine cycle doux
Secar a temperatura baja


DO NOT iron
 NE PAS repasser
NO planchar


DO NOT bleach
 NE PAS javeliser
NO utilizar lejía


DO NOT dry clean
 NE PAS faire nettoyer à sec
NO limpiar en seco


P11250400_A:08.18


Care Instructions
Instructions d'Entretien
Instrucciones de Cuidado


Hand wash with mild soap
 Laves à main à l'eau froide et savon doux
Lavar a mano en agua fría con jabón suave

Line dry
 Séchez sur corde à linge
Colgar para secar

DO NOT iron
 NE PAS repasser
NO planchar

DO NOT bleach
 NE PAS javeliser
NO utilizar lejía


DO NOT dry clean
 NE PAS faire nettoyer à sec
NO limpiar en seco

DO NOT machine dry
 NE PAS mettre dans une sécheuse
NO secar en secadora

P256900_R3:07.13

Crotch Rolls & Side Rolls

ANSWER:

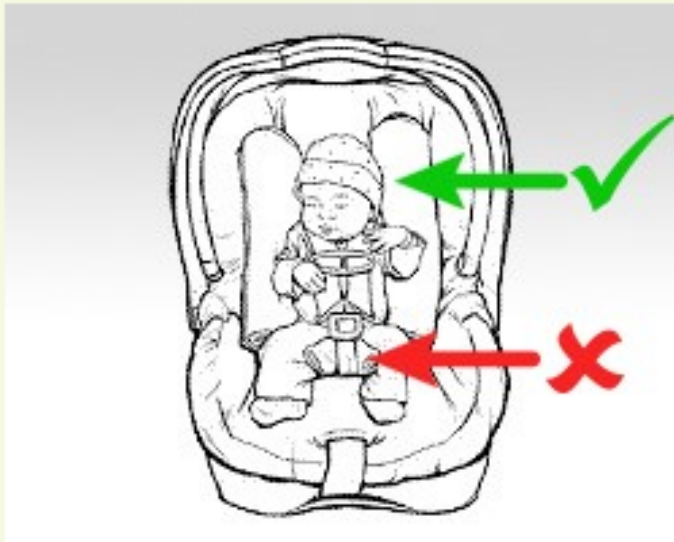

BRITAX rear-facing only and convertible car seats provide positioning inserts with the car seat. As well, offer multiple crotch buckle positions to assist in properly positioning and securing the child in the harness system.

If the positioning insert provided with the BRITAX car seat does not position the child as needed, it is acceptable to place a rolled receiving blanket on each side of the child for lateral support – once the child is properly secured within the harness as instructed in the user guide. The rolled receiving blankets should not be placed between the child and the harness.

It is **not** acceptable to use a crotch roll with any BRITAX car seat to position a child.



Serial numbers.....It is like finding Waldo!

Rear-Facing ONLY



PRODUCT NAME: XXXXXXXXXX MANUFACTURED/FABRICADOS: XXXXXXXXXX
BATCH NO: XXXXXXXXXX SERIAL NO: XXXXXXXXXX
MM | YYYY
MANUFACTURED BY/FABRICADOS: mo/mes | yr/año
FOR: BRITAX CHILD SAFETY, INC.
4140 PLEASANT RD., FORT MILL, SC 29708 USA
EXPIRES/EXPIRA: MMM/YYYY

One4Life All-in-One



CLICKTIGHT Convertibles



PRODUCT NAME: XXXXXXXXXX MANUFACTURED/FABRICADOS: XXXXXXXXXX
BATCH NO: XXXXXXXXXX SERIAL NO: XXXXXXXXXX
MM | YYYY
MANUFACTURED BY/FABRICADOS: mo/mes | yr/año
FOR: BRITAX CHILD SAFETY, INC.
4140 PLEASANT RD., FORT MILL, SC 29708 USA
EXPIRES/EXPIRA: MMM/YYYY

NON-CLICKTIGHT Convertibles



PRODUCT NAME: [#####] Model Number
BATCH NO: [#####]
SERIAL NO: [#####]
Manufactured in:
MM | YYYY
month, year

Look for the white label on the child's left-hand side of the seat near the head/ear area. This label displays the seat's model number, serial number, manufacture date, and batch number.




Grow With You & Grow With You CT



Pinnacle & Grow With You CT Plus



2-Stage Belt-Positioning Boosters

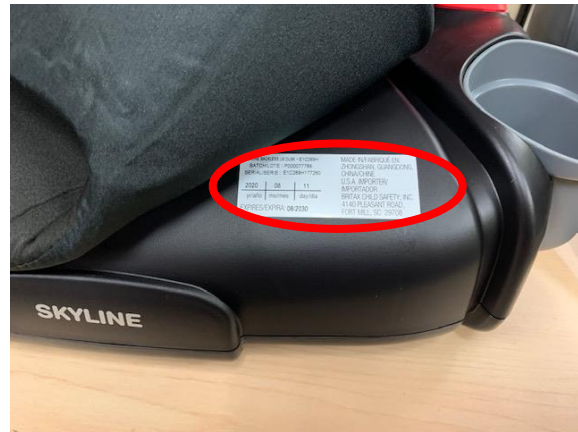

MANUFACTURED BY/FABRICADOS: mo/mes | yr/año
FOR: BRITAX CHILD SAFETY, INC.
4140 PLEASANT RD., FORT MILL, SC 29708 USA
EXPIRES/EXPIRA: MMM/YYYY

Belt-Positioning Boosters





Replacement after a Motor Vehicle Crash

Discontinue use of this child seat if it has been in a moderate or severe crash. It is not necessary to replace a car seat after a minor crash, defined by the US National Highway Traffic Safety Administration (NHTSA) as:

- a. The vehicle is drivable from the crash site; and
- b. The vehicle door nearest the child seat was not damaged; and
- c. No vehicle occupants were injured; and
- d. There is no visible damage to the child seat; and
- e. The airbags (if present) did not deploy

This information can be found in each Britax product user guide in the WARNINGS or IMPORTANT NOTES section.

Coats | Heavy Clothing



BULKY COAT



LOOSE HARNESS

The following is in each BRITAX user guide in “Securing the Child”.

IMPORTANT: Remove bulky coats and/ or jackets before putting the child in the car seat.

- Some suggestions would be:
 - Preheat car.
 - Put jacket on backwards after child is secured in harness.
 - The B-WARM can be used with any Britax rear-facing only seat.

Accessory / Non-Regulated BY BRITAX FOR BRITAX



**B-Warm Insulated
Infant Car Seat Cover**



Vehicle Seat Protector



**Seat Saver Waterproof
Liner**





**Head & Body Support
Pillow**



**EZ-Cling Window
Shades**

- Not just any item –
only made by Britax for Britax.
- You can find all Britax accessories by
visiting us.Britax.com

Use on Aircraft

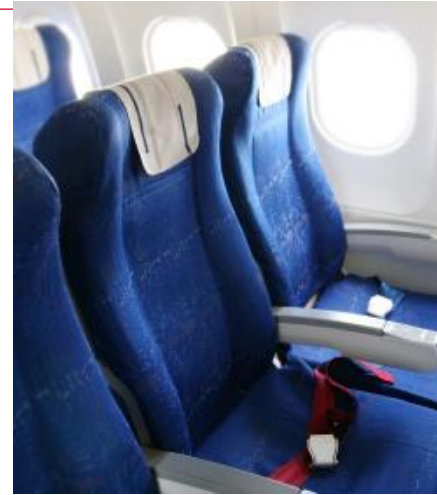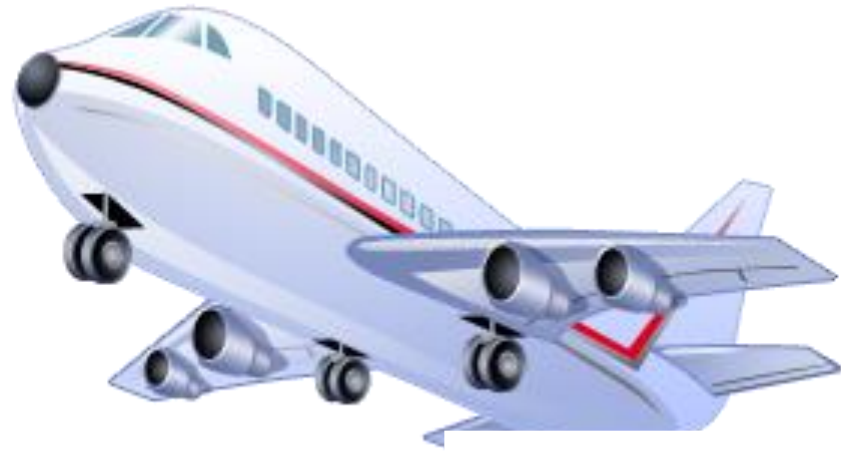

⚠ WARNING! DEATH OR SERIOUS INJURY can occur.

HARNES MODE • Use only in a rear-facing position when using it with an infant weighing less than 22 pounds (10 kg). • Use only with children who weigh between 5 and 65 pounds (2.3 and 29.5 kg) and with a height of 49 inches (124.5 cm) or less. • Rear-facing for children weighing between 5 and 50 pounds (2.3 and 22.7 kg) and forward-facing for children weighing between 22 and 65 pounds (10 and 29.5 kg). **BOOSTER MODE** • Use only with children who weigh between 40 and 120 lbs (18.1 and 54.4 kg) and whose height is between 44 and 63 inches (111.8 and 160 cm). • Snugly adjust the belts provided with this child restraint around your child. • Secure the top anchorage strap provided with this child restraint. • Use only the vehicle's lap and shoulder belt system when restraining the child in this booster seat. • Secure this child restraint with the vehicle's child restraint anchorage system, if available, or with a vehicle belt. • Follow all instructions on this child restraint and in the written instructions located in the pocket behind the cover of the child seat. • Register your child restraint with the manufacturer. • The provided infant positioning pillow **MUST** be removed for children weighing 20 lb (9.1 kg) or more.

✈ This child restraint system conforms to all applicable Federal Motor Vehicle Safety Standards. This Restraint is Certified for Use in Motor Vehicles and Aircraft when used in Harness Mode. This Restraint is Not Certified for Use in Aircraft when used in Booster Mode.

REAR-FACING INSTALLATION HARNES MODE	FORWARD-FACING INSTALLATION HARNES MODE
5 - 50 LBS (2.3 - 22.7 KG) Less than 49 in (124.5 cm)	22 - 65 LBS (10 - 29.5 KG) Less than 49 in (124.5 cm)
<p>Harness straps in closest position below the child's shoulders</p> <p>Lower Anchors Do not install by this method for a child weighing more than 30 lb (13.6 kg)</p> <p>Lap-Shoulder Belt Lap Belt Only</p>	<p>Harness straps in closest position above the child's shoulders</p> <p>Lower Anchors Do not install by this method for a child weighing more than 35 lb (15.9 kg)</p> <p>Lap Belt Only Lap-Shoulder Belt</p>

POB717400 A-07-19

- Make sure your car seats is approved for use on aircraft. Look for statement on label:
 - This restraint is certified for use in motor vehicles and aircraft.
 - Belt-positioning booster seats a NOT approved for use on aircraft.
- Best practice is EVERY family member has a seat and is properly secured (seat belt or car seat. While the FAA allows children under the age of 2 to be held on lap, remember – turbulences are unexpected at any time.
- Call airlines and ask if there are discounts for seats for children flying during non-popular times or flights.
- By bringing YOUR car seat with you – you do not have to worry about renting a car seat from a car rental agency.

Additional Resources: Installation Videos

- [CLICK HERE](#) Britax One4Life Car Seat Installation: Rear-Facing Harness Mode using LATCH
- [CLICK HERE](#) Britax One4Life Car Seat Installation: Rear-Facing Harness Mode using ClickTight (lap-shoulder belt)
- [CLICK HERE](#) Britax One4Life Car Seat Installation: Forward-Facing Harness Mode using ClickTight (lap-shoulder belt)
- [CLICK HERE](#) Britax One4Life Car Seat Installation: Belt-Positioning Booster Mode using Premium LATCH
- [CLICK HERE](#) Britax One4Life Car Seat: How to Install in Booster Mode using LATCH (hooks)
- [CLICK HERE](#) Britax One4Life Car Seat: How to Switch from Harness Mode to Booster Mode
Date of manufacture ~ September 11, 2020 to current
- [CLICK HERE](#) Britax One4Life Car Seat: How to Remove the Cover
- [CLICK HERE](#) Britax One4Life: How to Install the Cover
- [CLICK HERE](#) Britax One4Life Car Seat: How to Store Premium Quick-Push LATCH Connectors

Additional Resources



Installation Videos (YouTube Channel)

<http://youtube.com/BritaxUSACarSeats>



Access the current BRITAX product user guides

<https://us.britax.com/support/instructional-videos-and-user-manuals>



Contact Britax Customer Service

888-427-4829 | Monday-Thursday 9 AM – 5:15 PM | Friday 9 AM – 4:45 PM



To determine lower anchor and/or tether anchor capacity use by vehicle make.

<https://www.cpsboard.org/wp-content/uploads/2019/11/VM-LATCH-Anchor-Weight-Limits-2019-11.pdf>



Sarah Tilton, CPST-I

Director, Consumer Advocacy

Technician Discounts

Product Assistance as Technician/Instructor:



Email: Sarah.Tilton@Britax.com



Phone: (704) 409-1695



<https://www.facebook.com/britaxcpsti.sarahtilton>



Thank you for learning more about BRITAX!

- Please [CLICK HERE](#) to take the quiz for the Getting to Know the Britax One4Life All-In-One Car Seat CEU Opportunity.
- Once you complete the quiz, you will receive your results via email.
- If you do not receive an email regarding your score in a timely fashion: (a) check your spam/junk folder and (b) consult your IT department that the system will allow emails from ceuquiz@britax.com.
- If you *successfully* completed the quiz, please save the email or print a copy and save with your recertification documentation.
 - ✓ The emails come from wordpress@ceu.britaxusa.com. If you do not receive within 24-48 hours, please check your spam and junk folders. Some systems have been known not to deliver them to your inbox.
 - ✓ Certificates/emails of completion cannot be re-created.
- If you did not successfully complete the quiz, please review the material again and retake the quiz when you are ready.